

ALPHA 25W

Adjustable Tracklight DALI

Track lighting is used because of its flexibility in positioning fittings, and removing or adding fittings to achieve the correct luminance levels. It can focus the viewer's attention onto a piece of art work or display.

Alpha S perfectly combines design and function. Optimized passive cooling system ensures low temperature and long lifetime of LED.

The Alpha Track Light is an architectural design, a high lighting quality, with optimised efficiency. Ideal for museums, art galleries, restaurants and reception areas.



IP20



SPECIFICATIONS

Material Specifications

Material	Aluminium
Finish	Powder Coat
Dimensions	Head 90mm Dia x 220mm(L)
Adjustment	90° tilt, 359° rotation
Application	3-Wire Track
Options	Black Ring, Oblique Ring
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Integrated Tridonic Driver 700mA, DALI Dim
Input Voltage	240V
Connection Method	3 Circuit Track. Sold Separately

Optic Specifications


Light Source	28W Citizen LED
Beam Angle	40° (18° / 25° options)
CRI	90Ra
Colour Deviation	SDCM ≤ 3
Rated Lifetime (L80B20)	50,000 Hrs

VARIATIONS

LC5106D-18	ALPHA 25W Tracklight, Black, 18°, DALI, 3000K, 1900lm
LC5106D-25	ALPHA 25W Tracklight, Black, 25°, DALI, 3000K, 1900lm
LC5300D-25	ALPHA 25W Tracklight, White, 25°, DALI, 3000K, 1900lm
LC5106D-40	ALPHA 25W Tracklight, Black, 40°, DALI, 3000K, 1900lm
LC5100D-40	ALPHA 25W Tracklight, White, 40°, DALI, 3000K, 1900lm
LC5101D-40	ALPHA 25W Tracklight, White, 40°, DALI, 4000K, 2000lm
LC5186D-40	ALPHA 25W Tracklight, Black, 40°, DALI, 4000K, 2000lm

Classic Series

Proven. Quality. Customisable

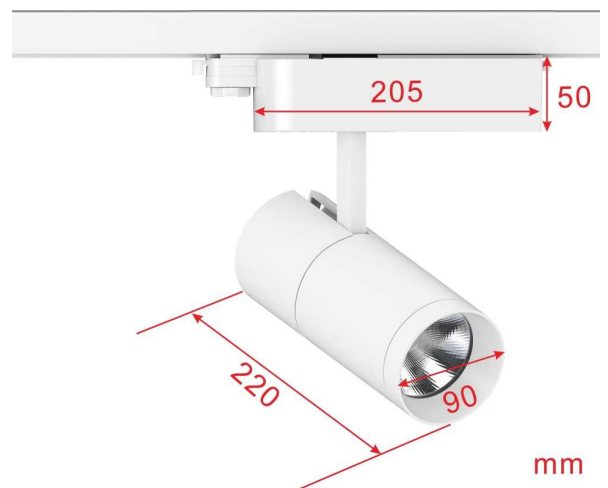

Classic Series

Proven. Quality. Customisable