

dynamic series


Efficient. Cutting Edge. Reliable

APEX 26W

Backlit Panel Light 1200x300

APEX 26W Backlit Panel Light 1200x300 is an indoor lighting solution suitable for commercial applications such as shops, offices, and shopping centres. It features a white aluminium frame and PS diffuser for uniform and soft lighting distribution. The panel is flicker-free, preventing eye strain and headaches. Only suitable for T-Bar plaster recess mounting.

No Light Guide Plate, No Yellowing. Standard Flicker Free.



IP20



Flicker Free




SPECIFICATIONS

Material Specifications

Material	Aluminium Frame, PS Diffuser
Finish	RAL9016 Traffic White
Dimensions	1195mm x 295mm x 30mm
Ingress Protection	IP20
Options	Suitable for T-Bar or Plaster Recess only
Weight	1.76Kg
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	MF C0650K SELV Remote Driver
Input Voltage	240V 50/60Hz
Options	DALI Available
Output Voltage	28V-40V (Driver output) Constant Current
Connection Method	Australian 2-Pin Plug & 1.2m Lead
Operating Temperature (Ta)	-25°C to +40°C

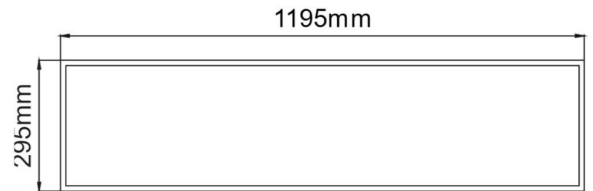

Optic Specifications

Light Source	2835 SMD
Nominal Lumens	2600lm (4000K)
CRI	80Ra
Beam Angle	120°
Colour Deviation	SDCM ≤ 5
UGR	<22
Reported L70 (Hours)	>60,000 Hrs

VARIATIONS

LC7710	APEX 26W 1200x300 Panel Light, White, Non-Dim, 4000K
---------------	--