

# APEX 27W-42W


## Backlit Panel Light 1200x300

**dynamic series**

Efficient. Cutting Edge. Reliable

APEX 27W-42W Backlit Panel Light 600x600. These Back-lit Panel lights are perfect as ceiling lights for T-BAR grid ceilings, or by using a plaster recessed frame. Ideal for commercial applications, including office spaces. Tri-Colour Switchable in 3000K, 4000K and 5000K.


No Light Guide Plate, No Yellowing. Standard Flicker Free.

**IP40****Flicker Free**

### SPECIFICATIONS

#### Material Specifications

<b>Material</b>	Aluminium Frame, PS Micro-Prismatic Diffuser
<b>Finish</b>	White - RAL9016
<b>Dimensions</b>	1195mm x 295mm x 35mm
<b>Ingress Protection</b>	IP40
<b>Options</b>	Suitable for T-Bar or Plaster Recess. For Surface Mount, Drivers are required to be remote mounted.
<b>Warranty</b>	5 Year Replacement

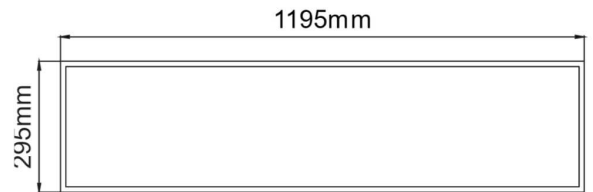

#### Electrical Specifications

<b>Power Supply</b>	Multi-Wattage, Lifud Flicker-Free
<b>System Watts</b>	Switchable (27W/30W/32W/34W/36W/38W/40W/42W)
<b>Input Voltage</b>	240V 50/60Hz
<b>Options</b>	DALI Available
<b>Output Voltage</b>	9V-42V (Driver output) Constant Current
<b>Connection Method</b>	Australian 2-Pin Plug & 1.2m Lead
<b>Operating Temperature (Ta)</b>	-30°C to +50°C

#### Optic Specifications

<b>Light Source</b>	2835 SMD LED Back-lit
<b>Efficacy</b>	122lm/W
<b>Correlated Colour Temperature</b>	3000K/4000K/5000K
<b>CRI</b>	Ra90+
<b>UGR</b>	<19
<b>Beam Angle</b>	120°

### VARIATIONS

<b>LC7703</b>	APEX 27W-42W 1200x300 Panel Light, White, 120°, Non-Dim, Tri-colour, 130lm/W
<b>LC7703D</b>	APEX 27W-42W 1200x300 Panel Light, White, 120°, DALI, Tri-colour, 130lm/W