

APEX 36W


Backlit Panel Light 600x600

dynamic series

Efficient. Cutting Edge. Reliable

APEX 36W Backlit Panel Light 600x600. These Panel lights are perfect as ceiling lights for T-BAR grid ceilings, or by using a plaster recessed frame. Ideal for commercial applications, including office spaces.

No Light Guide Plate, No Yellowing. Standard Flicker Free.



IP20



Flicker Free



SPECIFICATIONS

Material Specifications


Material	Aluminium Frame, PS Diffuser
Finish	RAL9016 Traffic White
Dimensions	595mm x 595mm x 30mm
Ingress Protection	IP20
Options	Suitable for T-Bar or Plaster Recess only
Weight	1.76Kg
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	MF C0650K SELV Remote Driver
Input Voltage	240V 50/60Hz
Options	DALI Available
Output Voltage	28V-40V (Driver output) Constant Current
Connection Method	Australian 2-Pin Plug & 1.2m Lead
Operating Temperature (Ta)	-25°C to +40°C

Optic Specifications

Light Source	2835 SMD
Nominal Lumens	3773lm
CRI	80Ra
Beam Angle	120°
UGR	<22
Reported L70 (Hours)	>60,000 Hrs

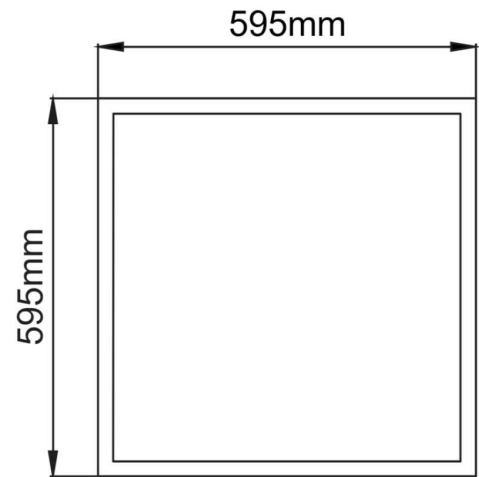

VARIATIONS

LC7705	Apex 36W 600x600 Panel Light, White, 120°, Non-Dim, 4000K, 3773lm
---------------	---