

ASTON MK-II 78W


Suspended Direct/Indirect 1961mm

Classic Series

Proven. Quality. Customisable

The ASTON MK-II Linear Series are a sleek, modern style perfect for commercial architecture. With a thin profile, this style is available in suspended, surface mounted and recessed.

The ASTON 78W Linear Direct/Indirect Pendant 1965mm is ideal for offices with higher ceilings. It creates a great ambient light, as well as providing focus below the fitting.



IP40



SPECIFICATIONS

Material Specifications

Material	1.0mm Aluminium Housing, with Opal Acrylic Diffuser
Colour	Powdercoat, Black or White
Ingress Protection	IP44
Dimensions	1961mm(L) x 65mm(W) x 88mm(D)
Suspension Length	1200mm
Warranty	5 Year Replacement

Electrical Specifications


Power Supply	Osram LED Driver, Non-Dimmable
Input Voltage	240V

Optic Specifications

Light Source	52W Direct/ 26W Indirect, Epistar SMD 5630
Nominal Lumens	8,048lm (5365lm Down / 2683lm Up)
CRI	80Ra
Beam Angle	85°
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs

VARIATIONS

LC8743B	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, Black, 85°, Non-Dim, 3000K
LC8743BD	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, Black, 85°, DALI, 3000K
LC8743S	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, Silver, 85°, Non-Dim, 3000K
LC8743SD	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, Silver, 85°, DALI, 3000K
LC8743W	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, White, 85°, Non-Dim, 3000K
LC8743WD	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, White, 85°, DALI, 3000K
LC8744B	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, Black, 85°, Non-Dim, 4000K
LC8744BD	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, Black, 85°, DALI, 4000K

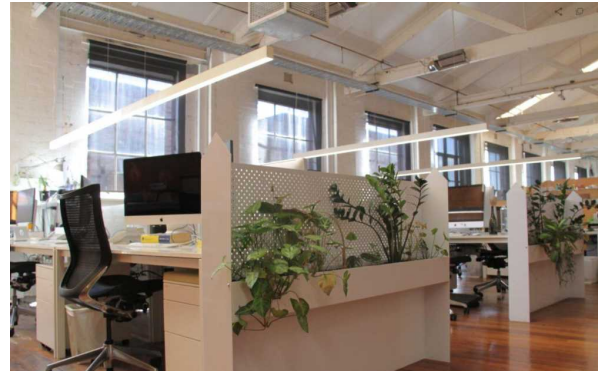

LC8744S	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, Silver, 85°, Non-Dim, 4000K
LC8744SD	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, Silver, 85°, DALI, 4000K
LC8744W	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, White, 85°, Non-Dim, 4000K
LC8744WD	ASTON MK-II 78W Suspended, 52W Direct/ 26W Indirect, White, 85°, DALI, 4000K

Classic Series

Proven. Quality. Customisable