

BLAIZE 24W

Square Panel Light 600x600

Classic Series

Proven. Quality. Customisable

The BLAIZE 24W LED Panel Light 600x600 is at the leading edge of commercial lighting. Suitable for surface mounting, or recessed, or suspended. Eliminate Maintenance Costs, and enjoy a high-efficiency light source. Flicker-Free Non-Dim driver is supplied as standard. A dimmable driver is available.

Verified by Techlume Australia on 05/07/2023



IP44



Flicker Free



SPECIFICATIONS

Material Specifications


Material	White Aluminium Frame. PMMA
Dimensions	595mm (L) x 595mm (W) x 12mm (D)
Weight	3.2Kg
Accessories	Optional Surface Mount & Plaster Recess Kits
Ingress Protection	IP44
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Non-Dimmable Boke Remote Driver
System Watts	24.2W
Options	DALI Available
Benefits	Australian 2-Pin Plug & 1.0m Lead
Input Voltage	240V
Operating Temperature (Ta)	-20°C to +45°C

Optic Specifications

Light Source	24W Epistar SMD High Output, 2-side Edge lit
Nominal Lumens	3,124lm (4000K)
Efficacy	Up to 129 lm/W
Beam Angle	120°
CRI	Ra 83
Calculated L70 (Hours)	>170,000 Hrs
Calculated L80 (Hours)	>110,000 Hrs
Calculated L90 (Hours)	>53,000 Hrs

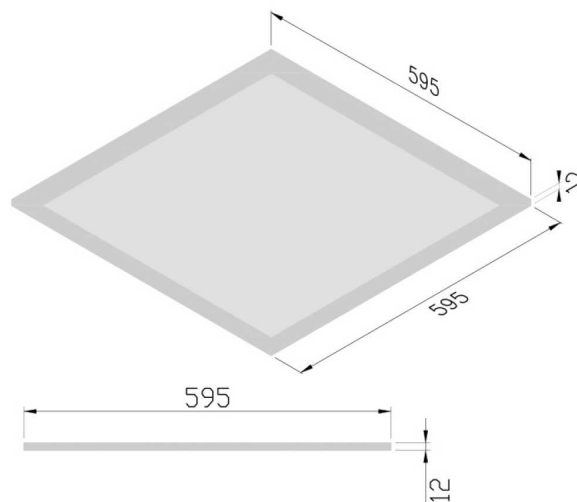

VARIATIONS

LC7204	BLAIZE 24W 600x600 Panel Light, Non-Dim, 3000K
LC7205	BLAIZE 24W 600x600 Panel Light, Non-Dim, 4000K, 3,124lm
LC7205D	BLAIZE 24W 600x600 Panel Light, DALI, 4000K, 3,124lm