

Classic Series

Proven. Quality. Customisable

BLAIZE 24W

Square Panel Light 600x600

The BLAIZE 24W LED Panel Light 600x600 is at the leading edge of commercial lighting. Suitable for surface mounting, or recessed, or suspended. Eliminate Maintenance Costs, and enjoy a high-efficiency light source. Flicker-Free Non-Dim driver is supplied as standard. A dimmable driver is available.

Verified by Techlume Australia on 05/07/2023



Flicker Free



SPECIFICATIONS

Material Specifications


| | |
|---------------------------|--|
| Material | White Aluminium Frame. PMMA |
| Dimensions | 595mm (L) x 595mm (W) x 12mm (D) |
| Weight | 3.2Kg |
| Accessories | Optional Surface Mount & Plaster Recess Kits |
| Ingress Protection | IP44 |
| Warranty | 5 Year Replacement |

Electrical Specifications

| | |
|-----------------------------------|-----------------------------------|
| Power Supply | Non-Dimmable Boke Remote Driver |
| System Watts | 24.2W |
| Options | DALI Available |
| Benefits | Australian 2-Pin Plug & 1.0m Lead |
| Input Voltage | 240V |
| Operating Temperature (Ta) | -20°C to +45°C |

Optic Specifications

| | |
|-----------------------------|--|
| Light Source | 24W Epistar SMD High Output, 2-side Edge lit |
| Nominal Lumens | 3,124lm |
| Efficacy | 129 lm/W |
| Beam Angle | 120° |
| CRI | Ra 83 |
| Reported L70 (Hours) | > 54,000 Hrs |

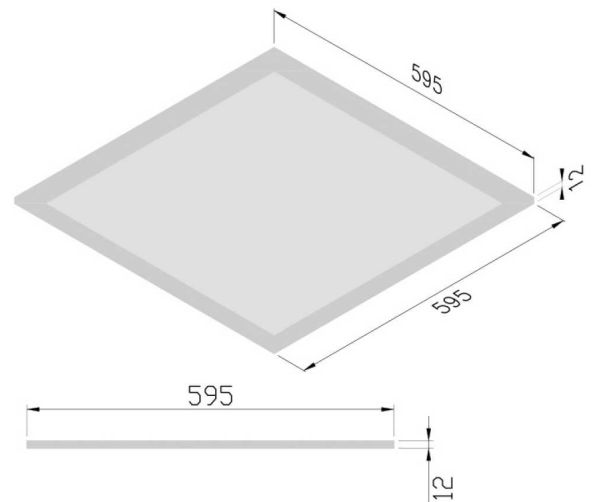

VARIATIONS

| | |
|----------------|---|
| LC7204 | BLAIZE 24W 600x600 Panel Light, Non-Dim, 3000K |
| LC7205 | BLAIZE 24W 600x600 Panel Light, Non-Dim, 4000K, 3,124lm |
| LC7205D | BLAIZE 24W 600x600 Panel Light, DALI, 4000K, 3,124lm |