

CADE 20W

600mm Slimline Ceiling Batten


dynamic series

Efficient. Cutting Edge. Reliable

The CADE 20W batten is the perfect LED replacement for surface mounted fluorescent light fittings or other surface mounted installations. Its slim aesthetic design can be used in a variety of applications including garages, stairwells, and change rooms. Available in both warm and cool white, in 20W and 40W options.

A 5 year warranty proves that it can stand the test of time.

Verified by Techlume Australia on 09/10/2023



IP44



SPECIFICATIONS

Material Specifications


Material	6063 Aluminum housing + PC cover + PC end caps
Finish	White Powdercoat
Dimensions	80mm (W) x 35mm (H) x 580mm (L)
Ingress Protection	IP44
Impact Rating	IK05
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Integral, Non-Dimmable, 260mA
Input Voltage	240V
System Watts	19.3W - 20.3W
Connection Method	450mm cable with Wago terminals
Operating Temperature (Ta)	-20°C to +45°C

Optic Specifications

Light Source	Epistar SMD x 100
Correlated Colour Temperature	Tri-colour: 3000K/4000K/6000K
Optics	Frosted Diffuser
Delivered Lumens	1,956lm (3000K)
Delivered Lumens	2,238lm (4000K)
Delivered Lumens	2,042lm (6000K)
Efficacy	Up to 115.8 lm/W
Beam Angle	115°
CRI	Ra >81
Reported L70 (Hours)	> 54,000 Hrs

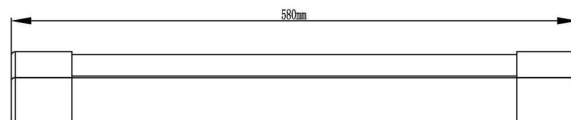

VARIATIONS

LC2389	CADE 20W Surface Batten, 580mm, White, 115°, Non-Dim, Tri-colour
---------------	--