

CALICO 40W


Surface Mount Batten

Classic Series

Proven. Quality. Customisable

This CALICO 40W wide-body batten light is a sleek design, adopting a high lumen 2835 SMD chip and high transmittance shade to create a uniform light output. Screwless design with large lighting area with high lumen efficiency. DALI available. Flicker-free drivers ensure a long lifespan.

It is designed for school lighting applications, such as classrooms, libraries, etc



IP44



SPECIFICATIONS

Material Specifications


Material	Aluminum housing + PC lens + PC end caps
Finish	RAL9016 Traffic White Powder Coat
Dimensions	210mm (W) x 70mm (H) x 1200mm (L)
Ingress Protection	IP44
Impact Rating	IK06
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Integral, Non-Dimmable, 260mA
Connection Method	3-block terminal
Operating Temperature (Ta)	-20°C to +45°C
Input Voltage	220-240V 50/60Hz
Output Current	370mA

Optic Specifications

Light Source	SMD-2835
Optics	Frosted Diffuser
Delivered Lumens	4,542lm (3000K)
Delivered Lumens	4,646lm (4000K)
Efficacy	Up to 119lm/W
Beam Angle	120°
CRI	>80Ra
Reported L70 (Hours)	> 60,000 Hrs
Calculated L70 (Hours)	80,000 Hrs

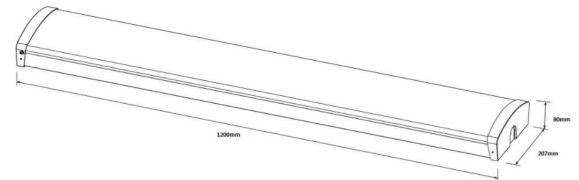

VARIATIONS

LC2276	CALICO 40W Surface Mount Batten, White, 120°, Non-Dim, 3000K, 4,542lm
LC2276D	CALICO 40W Surface Mount Batten, White, 120°, DALI, 3000K, 4,542lm
LC2275	CALICO 40W Surface Mount Batten, White, 120°, Non-Dim, 4000K, 4,646lm
LC2275D	CALICO 40W Surface Mount Batten, White, 120°, DALI, 4000K, 4,646lm