

# CADE 20W

## 600mm Slimline Ceiling Batten

dynamic series

Efficient. Cutting Edge. Reliable



The CADE 20W batten is the perfect LED replacement for surface mounted fluorescent light fittings or other surface mounted installations. Its slim aesthetic design can be used in a variety of applications including garages, stairwells, and change rooms. Available in both warm and cool white, in 20W and 40W options.

A 5 year warranty proves that it can stand the test of time.


Verified by Techlume Australia on 09/10/2023



### SPECIFICATIONS

#### Material Specifications

<b>Material</b>	6063 Aluminum housing + PC cover + PC end caps
<b>Finish</b>	White Powdercoat
<b>Dimensions</b>	80mm (W) x 35mm (H) x 580mm (L)
<b>Ingress Protection</b>	IP44
<b>Impact Rating</b>	IK05
<b>Warranty</b>	5 Year Replacement

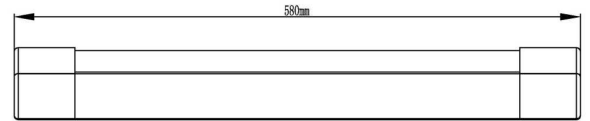

#### Electrical Specifications

<b>Power Supply</b>	Integral, Non-Dimmable, 260mA
<b>Input Voltage</b>	240V
<b>System Watts</b>	19.3W - 20.3W
<b>Connection Method</b>	450mm cable with Wago terminals
<b>Operating Temperature (Ta)</b>	-20°C to +45°C

#### Optic Specifications

<b>Light Source</b>	Epistar SMD x 100
<b>Correlated Colour Temperature</b>	Tri-colour: 3000K/4000K/6000K
<b>Optics</b>	Frosted Diffuser
<b>Delivered Lumens</b>	1,956lm (3000K)
<b>Delivered Lumens</b>	2,238lm (4000K)
<b>Delivered Lumens</b>	2,042lm (6000K)
<b>Efficacy</b>	Up to 115.8 lm/W
<b>Beam Angle</b>	115°
<b>CRI</b>	Ra >81
<b>Reported L70 (Hours)</b>	> 54,000 Hrs

### VARIATIONS

<b>LC2389</b>	CADE 20W Surface Batten, 580mm, White, 115°, Non-Dim, Tri-colour
---------------	--