

MODIS-M 25W

Suspended Can Light

The MODIS series is a modular lighting series with an exquisite design and UGR19 anti-glare feature. It supports six installation methods, including recessed, canopy ceiling, surface-mounted, pendant, and track options. With four size choices (Ø55mm, Ø65mm, Ø85mm, Ø100mm), it uses a Bridgelux COB light source, achieving 120lm/W efficiency. It offers interchangeable CCT and wattage (except Ø55mm), multiple reflector angles, and flicker-free drivers. Ideal for commercial and residential spaces, such as hotels, offices, museums, and homes.



SPECIFICATIONS

Material Specifications


| | |
|---------------------------|--|
| Material | Aluminium & Transparent Tempered Glass |
| Mounting | Suspended |
| Colour | Black RAL9005/ White RAL9016 |
| Dimensions | 85mm (Dia) x 1235mm (H) |
| Ingress Protection | IP20 |
| Warranty | 5 Year Replacement |

Electrical Specifications

| | |
|--------------------------|--|
| Power Supply | Integral Driver, 500mA, Phase Dimmable |
| Connection Method | Terminal Block in base |
| Input Voltage | 240V |

Optic Specifications

| | |
|-----------------------------|------------------|
| Light Source | Tridonic 25W LED |
| Delivered Lumens | 2150-3200lm |
| CRI | Ra >90 |
| Colour Deviation | SDCM ≤ 5 |
| Reported L70 (Hours) | 50,000 Hrs |

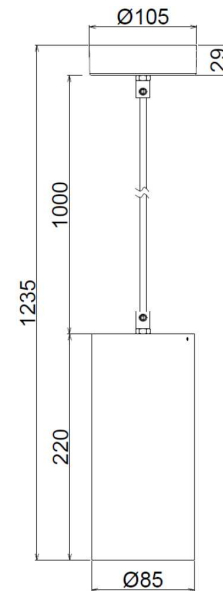

VARIATIONS

| | |
|----------------|---|
| LC1457B | MODIS-M 20W Suspended Can Light, Black, 36°, Phase Dim, Tri-Colour, 2150-3200lm |
| LC1457W | MODIS-M 20W Suspended Can Light, White, 36°, Phase Dim, Tri-Colour, 2150-3200lm |