

CREST 24W

UGR<19 Panel Light 1200x300

Classic Series

Proven. Quality. Customisable

The CREST 24W Panel Light 1200x300 is a high performing panel light designed with a micro prismatic diffuser which perfects the balance between light distribution, low glare, and visual appeal. Available in emergency and dimmable options. Superior Optical Design, Quick + Easy Retrofit, Flicker + Glare Free, Engineered to Perfection.



IP44



Flicker Free

SPECIFICATIONS

Material Specifications


Material	Aluminium Edgefold Back Sheet
Finish	White
Dimensions	1195mm (L) x 295mm (W) x 10mm (D)
Ingress Protection	IP44
Accessories	Surface Mount Kits, Plaster Recessed Kits, Suspension Kits
Weight	3kg
Warranty	5 Year Warranty

Electrical Specifications

Power Supply	Non-Dim Driver (Flicker Free)
Input Voltage	240V
Connection Method	Australian 2-Pin Plug & 1.2m Lead
Operating Temperature (Ta)	-20°C to +45°C

Optic Specifications

Optics	PMMA LGP
Delivered Lumens	Up to 3,416lm
CRI	Ra 80 (Ra 90 available for project orders)
Calculated L70 (Hours)	>170,000 Hrs
Calculated L80 (Hours)	>110,000 Hrs
Calculated L90 (Hours)	>53,000 Hrs
Light Source	2 Sides Edge-lit

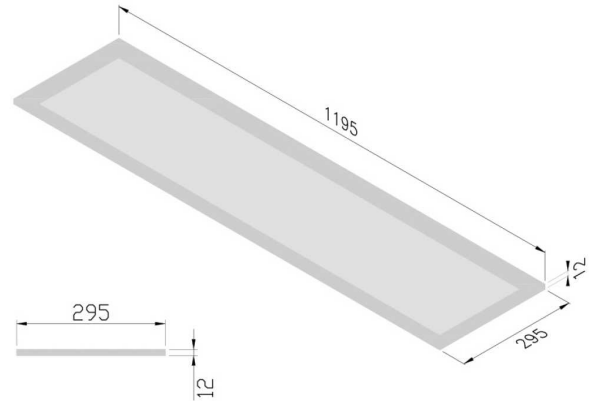

VARIATIONS

LC7211	CREST 24W Anti-Glare Panel Light 1200x300, 100°, Non-Dim, 3000K, 3,192lm
LC7212	CREST 24W Anti-Glare Panel Light 1200x300, 100°, Non-Dim, 4000K, 3,416lm
LC7212R	CREST 24W Anti-Glare Panel Light 1200x300, 100°, Non-Dim, 4000K, CRI >90, 2,903lm
LC7212D	CREST 24W Anti-Glare Panel Light 1200x300, CREST 24W Anti-Glare Panel Light 1200x300, DALI2, 4000K, 3,416lm