

CREST 24W

Square UGR<19 Panel Light 600x600

Classic Series

Proven. Quality. Customisable

The CREST 24W LED is a high performing 600x600 Panel Light designed with a micro prismatic diffuser which perfects the balance between light distribution, low glare, and visual appeal. CREST range are the ideal alternative to T8 fluorescent troffers and compare well with current T5 technology. They are used widely in a range of applications across Australia.

Verified by Techlume Australia on 12/07/2023



IP44



SPECIFICATIONS

Material Specifications


Material	Aluminium Edgefold Back Sheet
Finish	White
Dimensions	595mm (L) x 595mm (W) x 10mm (D)
Ingress Protection	IP44
Accessories	Surface Mount Kits, Plaster Recessed Kits, Suspension Kits
Weight	3kg
Warranty	5 Year Warranty

Electrical Specifications

Power Supply	Non-Dim Driver
Options	DALI Available
System Watts	24.4W
Input Voltage	240V
Connection Method	Australian 2-Pin Plug & 1.2m Lead
Operating Temperature (Ta)	-20°C to +45°C

Optic Specifications

Optics	PMMA LGP
Light Source	4 Sides Edge-lit
Delivered Lumens	3,094lm
Efficacy	127 lm/W
CRI	Ra 82
UGR	< 19
Calculated L70 (Hours)	>170,000 Hrs
Calculated L80 (Hours)	>110,000 Hrs
Calculated L90 (Hours)	>53,000 Hrs

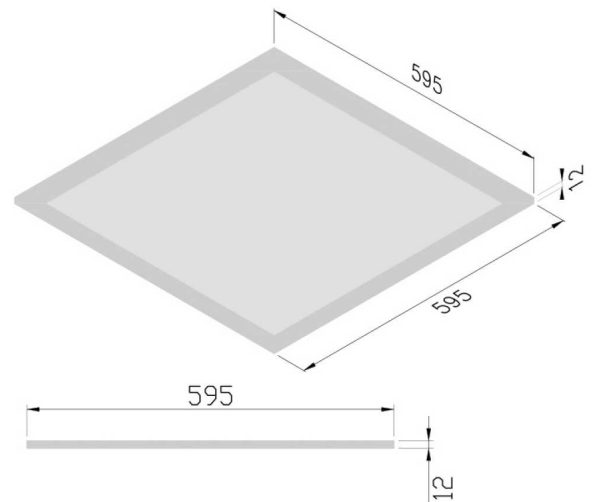

VARIATIONS

LC7214	CREST 24W Anti-Glare Panel Light 600x600, 100°, Non-Dim, 3000K
LC7215	CREST 24W Anti-Glare Panel Light 600x600, 100°, Non-Dim, 4000K, 3,094lm
LC7215D	CREST 24W Anti-Glare Panel Light 600x600, 100°, DALI, 4000K, 3,094lm