


# CREST 40W

## Square UGR<19 Panel Light 600x600

### Classic Series

Proven. Quality. Customisable

The CREST 40W LED is a high performing 600x600 Panel Light designed with a micro prismatic diffuser which perfects the balance between light distribution, low glare, and visual appeal. Applications including Schools, Universities, Offices, Libraries, Lobbies, Toilets, Office Areas, Meeting Rooms, Boardrooms, Conference Rooms, Classrooms.



**IP44**



**Flicker Free**

### SPECIFICATIONS

#### Material Specifications



|                           |  |
|---------------------------|--|
| <b>Material</b>           | Aluminium Edgefold Back Sheet                              |
| <b>Finish</b>             | White  |
| <b>Dimensions</b>         | 595mm (L) x 595mm (W) x 10mm (D)                           |
| <b>Ingress Protection</b> | IP44   |
| <b>Accessories</b>        | Surface Mount Kits, Plaster Recessed Kits, Suspension Kits |
| <b>Weight</b>             | 3kg  |
| <b>Warranty</b>           | 5 Year Warranty  |

#### Electrical Specifications

|                                   |                                   |
|-----------------------------------|-----------------------------------|
| <b>Power Supply</b>               | Non-Dim Driver (Flicker Free)     |
| <b>Options</b>                    | DALI Available                    |
| <b>Input Voltage</b>              | 240V                              |
| <b>Connection Method</b>          | Australian 2-Pin Plug & 1.2m Lead |
| <b>Operating Temperature (Ta)</b> | -20°C to +45°C                    |

#### Optic Specifications

|                               |                       |
|-------------------------------|-----------------------|
| <b>Optics</b>                 | PMMA LGP              |
| <b>Delivered Lumens</b>       | 4794lm                |
| <b>Light Source</b>           | LED, 2 Sides Edge-lit |
| <b>CRI</b>                    | 80Ra                  |
| <b>Calculated L70 (Hours)</b> | >170,000 Hrs          |
| <b>Calculated L80 (Hours)</b> | >110,000 Hrs          |
| <b>Calculated L90 (Hours)</b> | >53,000 Hrs           |

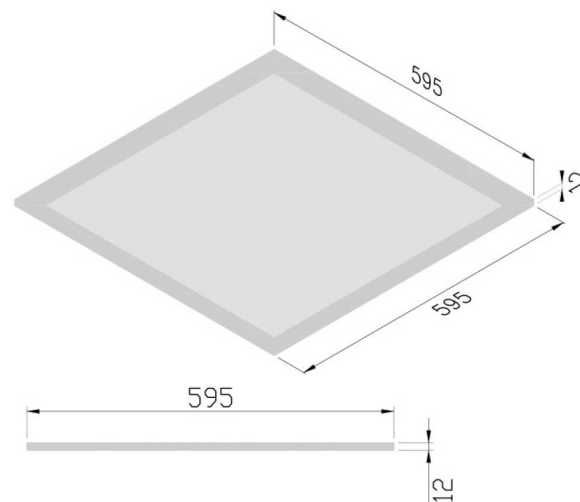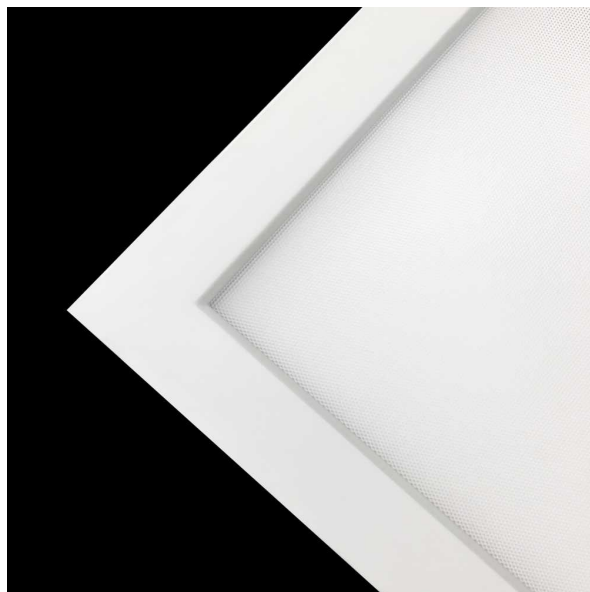

### VARIATIONS

|               |  |
|---------------|--|
| <b>LC7152</b> | CREST 40W Anti-Glare Panel Light 600x600, 100°, Non-Dim, 3000K         |
| <b>LC7153</b> | CREST 40W Anti-Glare Panel Light 600x600, 100°, Non-Dim, 4000K, 4794lm |