

DELTA MK-II 8W

Up/Down Exterior Wall Light

Lifestyle Series
Style. Altitude. Luxury

The DELTA 8W Exterior Light is a cylindrical design with two fixed light beams shining up and down. It is suitable for various facade lighting applications, including accent lighting, building columns, and architectural highlighting.

Designed with a one-piece body, integrated driver housing, and protective glass lenses on the two light heads, this modern luminaire provides a stylish solution for outdoor wall-mounted lights. A mounting plate is also included.



SPECIFICATIONS

Material Specifications


Material	6063 Aluminium
Colour	Black Powder Coat
Dimensions	178mm(H) x 78mm(D) (Overall Fitting)
Dimensions	52*33mm (Mounting Plate)
Impact Rating	IK06
Ingress Protection	IP65
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	8W Triac Dim Driver 180mA
Operating Temperature (Ta)	-20°C to +45°C
Input Voltage	240V
Protection	Short Circuit, Over Voltage, Over Temperature

Optic Specifications

Light Source	Bridgelux, 2x4W COB (included)
CRI	> 80Ra
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 60,000 Hrs
Calculated L80 (Hours)	>45,000 Hrs

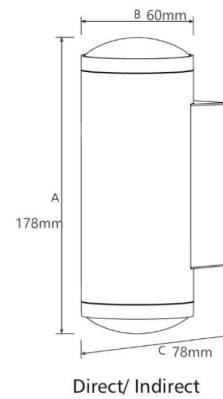

VARIATIONS

DLT-8W-3K-B	DELTA MK-II 8W Up/Down Wall Light, Black, 100°, Phase Dim, 3000K, 880lm
DLT-8W-4K-B	DELTA MK-II 8W Up/Down Wall Light, Black, 100°, Phase Dim, 4000K, 1010lm