

# DEX 60W

## Industrial Streetlight

dynamic series

Efficient. Cutting Edge. Reliable

The DEX 60W LED streetlight offers a reliable and modular LED solution for retrofits and new installs. The high output 60W Epistar LED chip features a Batwing distribution lens system to ensure a wide and even spread of light, which is perfect for paths and walkways. The architectural design heat sink maximises cooling of both the LED chips and driver for greater system reliability.

The Dex Streetlight Range are designed for exterior applications where design and style matters. Suited for carparks, boardwalks and common thoroughfares.



### SPECIFICATIONS

#### Material Specifications


Colour	Corrosion Resistant Powder Coat
Dimensions	500mm (L) x 214mm (W) x 81mm (H)
Spigot Size	53mm (Dia)
Ingress Protection	IP65
Impact Rating	IK09
Warranty	5 Year Replacement

#### Electrical Specifications

Power Supply	Integral Sosen Driver, Non-Dimmable
Input Voltage	240V
Connection Method	Hard Wiring Required
Operating Temperature (Ta)	-25°C to +45°C

#### Optic Specifications

Light Source	1pc 60W Epistar COB
Delivered Lumens	7670lm
CRI	80Ra
Beam Angle	150°
Rated Lifetime (L70B20)	40,000 Hrs

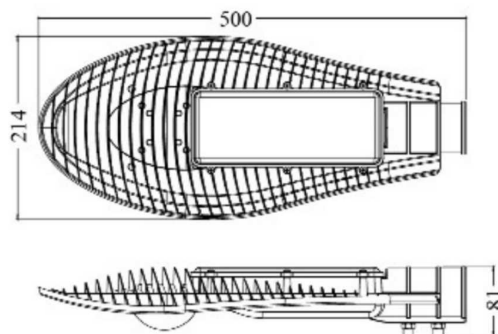

### VARIATIONS

LC6522	DEX 60W LED Streetlight, Black, Non-Dim, 3000K
LC6504	DEX 60W LED Streetlight, Black, Non-Dim, 5700K