


DEX 80W

Industrial Streetlight

dynamic series

Efficient. Cutting Edge. Reliable

The Dex Streetlight Range is designed for exterior applications where design and style matters. DEX has a sleek contemporary design constructed with a durable aluminium body that is anti-corrosion powder coated. It has excellent optical quality and a toughened glass diffuser. The DEX 80W Streetlight has brilliant horizontal light distribution for even light spread. Suited for carparks, boardwalks and common thoroughfares.




IP65



SPECIFICATIONS

Material Specifications

Material	Die-cast High Grade Aluminium
Colour	Corrosion Resistant Powder Coat, Black
Ingress Protection	IP65
Impact Rating	IK09
Dimensions	620mm (L) x 260mm (W) x 101mm (H)
Spigot Size	65mm Dia
Weight	3.8kg
Warranty	5 Year Replacement

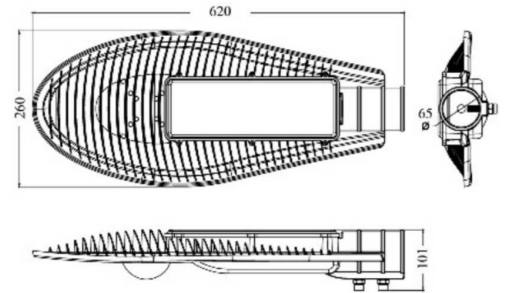

Electrical Specifications

Power Supply	Integral Sosen Driver, Non-Dim
Input Voltage	240V
Connection Method	Hard Wiring Required
Operating Temperature (Ta)	-25°C to +45°C

Optic Specifications

Light Source	1pc 80W Epistar COB
Delivered Lumens	9,272lm
CRI	80Ra
Beam Angle	150°
Rated Lifetime (L70B20)	40,000 Hrs

VARIATIONS

LC6501	DEX 80W LED Streetlight, Black, Non-Dim, 5700K
---------------	--