


# LIQUID 4

## Commercial Downlight 125mm

The LIQUID 125mm Downlight is used in commercial applications where style and class is important. Used in schools, hospitals, corridors and IP65 Rated for wet areas. Direct output with a 60° beam angle. With a customisable output, it is available with an output of 8W-20W.



### SPECIFICATIONS

#### Material Specifications


<b>Material</b>	Aluminium Diecast Housing / Clear Diffuser
<b>Finish</b>	Smooth Powder Coat White Trim
<b>Dimensions</b>	144mm (Face Dia) x 71mm (H)
<b>Cutout</b>	125mm
<b>Ingress Protection</b>	IP65
<b>Warranty</b>	5 Year Replacement

#### Electrical Specifications

<b>Power Supply</b>	Tridonic TRIAC
<b>Options</b>	DALI, CLO Programmed Output
<b>Operating Temperature (Ta)</b>	-20°C to +40°C
<b>Connection Method</b>	Australian Flex & Plug

#### Optic Specifications

<b>Light Source</b>	Philips COB LED
<b>Delivered Lumens</b>	640lm - 1600lm NFC Programmable
<b>CRI</b>	90+Ra
<b>Beam Angle</b>	60°
<b>Reported L70 (Hours)</b>	> 50,000 Hrs

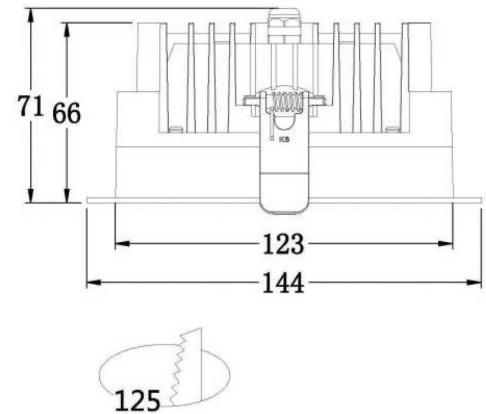

### VARIATIONS

<b>DL03-4-27K</b>	LIQUID 4, 8-20W Downlight, White, Phase Dim, 2700K
<b>DL03-4-3K</b>	LIQUID 4, 8-20W Downlight, White, Phase Dim, 3000K
<b>DL03-4-35K</b>	LIQUID 4, 8-20W Downlight, White, Phase Dim, 3500K
<b>DL03-4-4K</b>	LIQUID 4, 8-20W Downlight, White, Phase Dim, 4000K
<b>DL03-4-5K</b>	LIQUID 4, 8-20W Downlight, White, Phase Dim, 5000K