EXODUS FASTFIT 3W
Surface Mount Exit Light

One Box Solution - Maintained LED Slide'n'Connect Fit Exit Light. Compatible with similar slide'n'connect style brackets for ease of maintenance and replacement in a wide variety of indoor applications.

Using a simple slide and connect installation, its robust design allows it to be used in a wide variety of indoor applications, ranging from offices to retail stores, cafes and public spaces. Comes with all variations of the Running Man pictogram. C0-D4, C90-D8
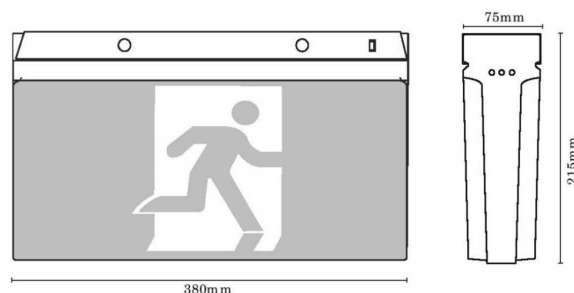
IP20

SPECIFICATIONS

Material Specifications

Material	Flame-Retardant Polycarbonate
Mounting	Surface Mounted - Wall or Ceiling
Dimensions	380mm(L) x 75mm(W) x 215mm(H)
Weight	2.0Kg
Ingress Protection	IP20
Warranty	5 Year Replacement

Electrical Specifications

Input Voltage	240V; 50Hz
Mode of Operation	Maintained
Battery & Charger System	Lithium Battery w. Intelligent 3-stage charger and battery management
Operating Temperature (Ta)	1°C - 40°C
Protection	overcharge, low voltage disconnect, overcurrent, short circuit
Connection Method	Large Terminal Block, 20mm^2 Cable Entry
Emergency Duration	>120 Minutes
Testing Facility	Manual Test Switch
Indicators	Battery Charge Green LED

Optic Specifications

Light Source	High output LED Strip
LED Wattage	3W (2W Standby)
AS2293 Classification	C0-D4, C90-D8

75mm

215mm

380mm

VARIATIONS

EXS-FIT	FASTFIT 3W Slide'n'Connect Slimline Exit - 24m, maint., White