




Outreach Arm

Triple

The Horizon Poles Triple Outreach Arms are available in 2 styles; a T-Section, or Equal Spacings.

A T-section design is often used in a carpark area, when a pole is mounted in a garden bed.

An Equal Spacing Triple Outreach is used to evenly light up 360 degrees around the pole.

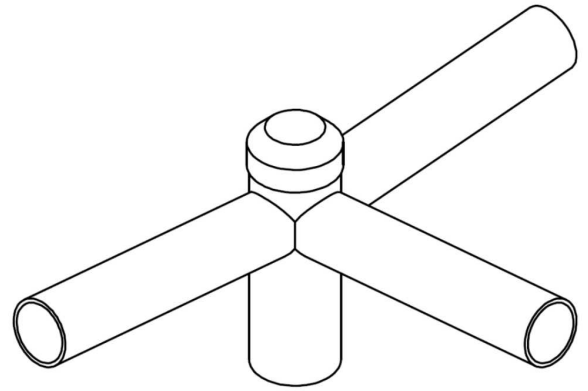

SPECIFICATIONS

Material Specifications

Finish	Hot Dip Galvanised, or Black Powder Coat
Dimensions	220mm (H)
Spigot Size	60mm/ 76mm/ 89mm

VARIATIONS

TOA300-76-60	Triple Outreach Arm 300mm, 76mm Spigot with 60mm Arms (Equal Spacings), Hot Dip Galvanised
TOA300-76-60-PC	Triple Outreach Arm 300mm, 76mm Spigot with 60mm Arms (Equal Spacings), Textura Black Powder Coat
TOA300T-76-60	Triple Outreach Arm 300mm, 76mm Spigot with 60mm Arms (T-Section), Hot Dip Galvanised
TOA300T-76-60-PC	Triple Outreach Arm 300mm, 76mm Spigot with 60mm Arms (T-Section), Textura Black Powder Coat
TOA600-60-60	Triple Outreach Arm 600mm, 60mm Spigot with 60mm Arms (Equal Spacings), Hot Dip Galvanised
TOA600-60-60-PC	Triple Outreach Arm 600mm, 60mm Spigot with 60mm Arms (Equal Spacings), Textura Black Powder Coat
TOA600-76-60	Triple Outreach Arm 600mm, 76mm Spigot with 60mm Arms (Equal Spacings), Hot Dip Galvanised
TOA600-76-60-PC	Triple Outreach Arm 600mm, 76mm Spigot with 60mm Arms (Equal Spacings), Textura Black Powder Coat
TOA600-89-60	Triple Outreach Arm 600mm, 89mm Spigot with 60mm Arms (Equal Spacings), Hot Dip Galvanised
TOA600T-89-60	Triple Outreach Arm 600mm, 89mm Spigot with 60mm Arms (T-Section), Hot Dip Galvanised
TOA1000-60	Triple Outreach Arm 1000mm, 76mm Spigot to suit 60mm OD, w. 60mm Arms, Equal Spacings, Hot Dip Galvanised
TOA1200T-76-60	Triple Outreach Arm 1200mm w. 60mm Spigot, Hot Dip Galvanised