

Classic Series

Proven. Quality. Customisable

KALO 13W

Commercial Downlight 100mm

The **KALO** Super Comfort Deep Recessed 13W Commercial Downlight 100mm is used in commercial applications where style and class is important. At IP54 Rated, it can be used in schools, hospitals, corridors and wet areas. With a matt silver reflector and diffused lens the KALO series offers excellent optical control along with architectural interest.



SPECIFICATIONS

Material Specifications


Material	High Grade Aluminium
Finish	Smooth Powder Coat
Dimensions	110mm Dia x 79mm (H)
Cutout	100mm (Dia)
Ingress Protection	IP54
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	15W Actec Phase Dim Driver
Options	DALI Available, 30° Beam Angle
Connection Method	Australian 2-Pin Plug and 1.0m Lead
Input Voltage	240V

Optic Specifications

Light Source	Citizen COB LED
Delivered Lumens	1300lm
UGR	<19
CRI	83Ra
Beam Angle	50°
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs
Calculated L70 (Hours)	115,000 Hrs

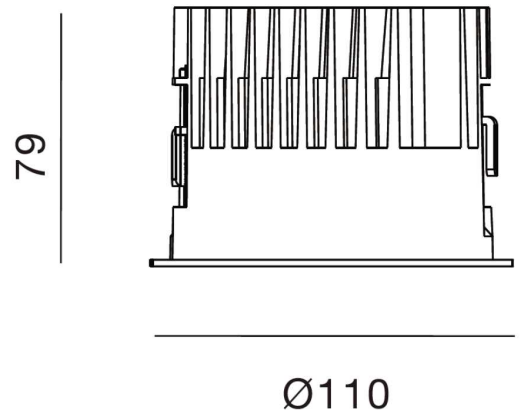

VARIATIONS

LC5420	KALO 13W Commercial Downlight, White, 50°, Phase Dim, 3000K, 1287lm
LC5420B	KALO 13W Commercial Downlight, Black, 50°, Phase Dim, 3000K, 1287lm
LC5421	KALO 13W Commercial Downlight, White, 50°, Phase Dim, 4000K, 1369lm
LC5421B	KALO 13W Commercial Downlight, Black, 50°, Phase Dim, 4000K, 1369lm