

KALO 25W

Commercial Downlight 150mm

Classic Series

Proven. Quality. Customisable

The KALO 25W Commercial Downlight is used in commercial applications where style and class are important. Boasting a low profile for the output, this IP54 Rated Downlight is used in schools, hospitals, corridors and wet areas. With a matt silver reflector and diffused lens the KALO series offers excellent optical control along with visual interest.



SPECIFICATIONS

Material Specifications

Material	High Grade Aluminium
Finish	Smooth Powder Coat
Dimensions	160mm Dia x 100mm (H)
Cutout	150mm (Dia)
Ingress Protection	IP54
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	28W Actec Phase Dim Driver
Options	DALI Available
Connection Method	Australian 2-Pin Plug and 1.0m Lead
Input Voltage	240V


Optic Specifications

Light Source	Citizen COB LED
Delivered Lumens	2700lm
UGR	<19
CRI	90
Beam Angle	60°
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs
Calculated L70 (Hours)	115,000 Hrs

VARIATIONS

LC5440	KALO 25W Commercial Downlight, White, 60°, Phase Dim, 3000K
LC5440B	KALO 25W Commercial Downlight, Black, 60°, Phase Dim, 3000K
LC5441	KALO 25W Commercial Downlight, White, 60°, Phase Dim, 4000K
LC5441B	KALO 25W Commercial Downlight, Black, 60°, Phase Dim, 4000K
LC5451	KALO 25W Commercial Downlight, White, 60°, Phase Dim, 4000K
LC5451D	KALO 25W Commercial Downlight, White, 60°, DALI, 4000K

100

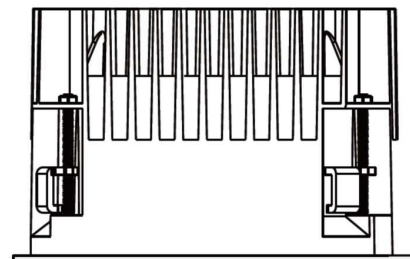

Ø160