

KALO 38W

Commercial Downlight 200mm

Classic Series

Proven. Quality. Customisable

The KALO 38W Commercial Downlight is used in commercial applications. Installation areas include foyers, lobbies, corridors and toilets and schools.

The KALO commercial downlight range offers a high performance lighting solution, delivering up to 60% energy savings as a twin compact fluorescent (CFL) or metal halide light replacement.



IP54



SPECIFICATIONS

Material Specifications


Material	Aluminium
Finish	Textured Powder Coat - Black or White
Accessories	Black, White or Matt Silver Reflector
Dimensions	218mm Face Dia x 132mm (H)
Cutout	200mm (Dia)
Ingress Protection	IP54
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Tridonic 42W Non-Dimmable driver
Options	DALI, 1-10V, Phase-Dim Available
Connection Method	Australian 2-Pin Plug & 1.0m Lead
Input Voltage	240V

Optic Specifications

Light Source	Citizen COB LED
Delivered Lumens	3800 - 4000lm
UGR	<19
CRI	83Ra
Beam Angle	60° (18° & 30° Optional)
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs
Calculated L70 (Hours)	115,000 Hrs

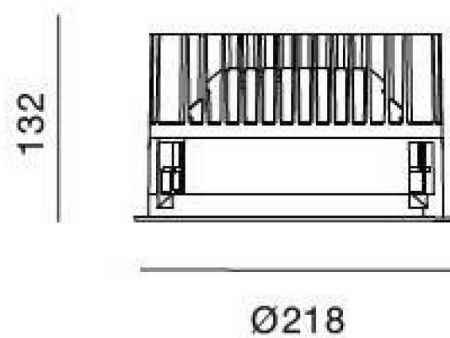

VARIATIONS

LC5460	KALO 38W Commercial Downlight, White, 60°, Phase Dim, 3000K, 3882lm
LC5460B	KALO 38W Commercial Downlight, Black, 60°, Phase Dim, 3000K, 3882lm
LC5461	KALO 38W Commercial Downlight, White, 60°, Phase Dim, 4000K, 4023lm
LC5461D	KALO 38W Commercial Downlight, White, 60°, DALI, 4000K, 4023lm
LC5461B	KALO 38W Commercial Downlight, Black, 60°, Phase Dim, 4000K, 4023lm
LC5460D	KALO 38W Commercial Downlight, White, 60°, DALI, 3000K, 3882lm