

**Classic Series**

Proven. Quality. Customisable

# KALO 38W

## Commercial Downlight 200mm

The KALO 38W Commercial Downlight is used in commercial applications. Installation areas include foyers, lobbies, corridors and toilets and schools.

The KALO commercial downlight range offers a high performance lighting solution, delivering up to 60% energy savings as a twin compact fluorescent (CFL) or metal halide light replacement.



### SPECIFICATIONS

#### Material Specifications


<b>Material</b>	Aluminium
<b>Finish</b>	Textured Powder Coat - Black or White
<b>Accessories</b>	Black, White or Matt Silver Reflector
<b>Dimensions</b>	218mm Face Dia x 132mm (H)
<b>Cutout</b>	200mm (Dia)
<b>Ingress Protection</b>	IP54
<b>Warranty</b>	5 Year Replacement

#### Electrical Specifications

<b>Power Supply</b>	Tridonic 42W Non-Dimmable driver
<b>Options</b>	DALI, 1-10V, Phase-Dim Available
<b>Connection Method</b>	Australian 2-Pin Plug & 1.0m Lead
<b>Input Voltage</b>	240V

#### Optic Specifications

<b>Light Source</b>	Citizen COB LED
<b>Delivered Lumens</b>	3800 - 4000lm
<b>UGR</b>	<19
<b>CRI</b>	83Ra
<b>Beam Angle</b>	60° (18° & 30° Optional)
<b>Colour Deviation</b>	SDCM ≤ 3
<b>Reported L70 (Hours)</b>	> 54,000 Hrs
<b>Calculated L70 (Hours)</b>	115,000 Hrs

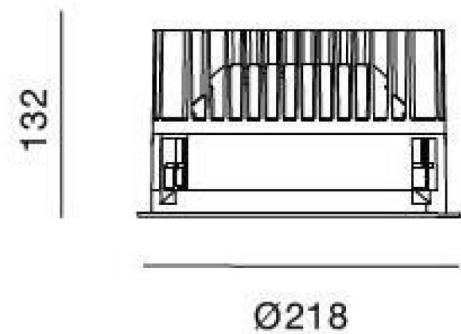

### VARIATIONS

<b>LC5460</b>	KALO 38W Commercial Downlight, White, Phase Dim, 3000K, 3882lm
<b>LC5460B</b>	KALO 38W Commercial Downlight, Black, Phase Dim, 3000K, 3882lm
<b>LC5461</b>	KALO 38W Commercial Downlight, White, Phase Dim, 4000K, 4023lm
<b>LC5461D</b>	KALO 38W Commercial Downlight, White, DALI, 4000K, 4023lm
<b>LC5461B</b>	KALO 38W Commercial Downlight, Black, Phase Dim, 4000K, 4023lm