

KALO 9W

Commercial Downlight 100mm

Classic Series

Proven. Quality. Customisable

The KALO 9W Commercial Downlight 100mm is used in commercial applications where style and class is important. At just 79mm, this is a very low profile commercial downlight. IP54 Rated. Used in schools, hospitals, corridors and wet areas. With a matt silver reflector and diffused lens the KALO series offers excellent optical control along with visual interest.



SPECIFICATIONS

Material Specifications


Material	High Grade Aluminium
Finish	Smooth Powder Coat
Dimensions	110mm Dia x 79mm (H)
Cutout	100mm (Dia)
Ingress Protection	IP54
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	11W Actec Phase-Dimmable Driver
Options	DALI Available
Connection Method	Australian 2-Pin Plug and 1.0m Lead
Input Voltage	240V

Optic Specifications

Light Source	Citizen COB LED
Delivered Lumens	987lm (3000K)
Delivered Lumens	1053lm (4000K)
UGR	<19
CRI	90
Calculated L90 (Hours)	>52,000 Hrs
Beam Angle	50°
Colour Deviation	SDCM ≤ 3

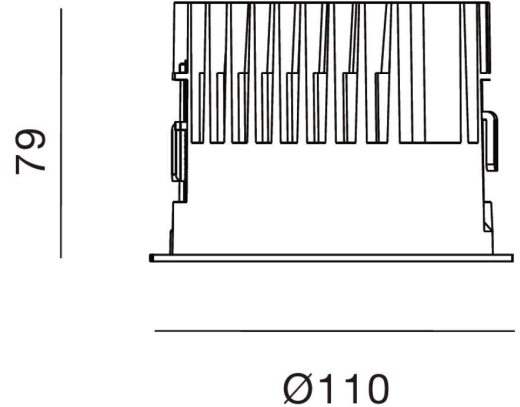

VARIATIONS

LC5410	KALO 9W Commercial Downlight, White, 50°, Phase Dim, 3000K, 987lm
LC5410B	KALO 9W Commercial Downlight, Black, 50°, Phase Dim, 3000K, 987lm
LC5411	KALO 9W Commercial Downlight, White, 50°, Phase Dim, 4000K, 1053lm
LC5411B	KALO 9W Commercial Downlight, Black, 50°, Phase Dim, 4000K, 1053lm