

KINGSTON 150W


Streetlight w. PE Cell

Classic Series

Proven. Quality. Customisable

The KINGSTON 150W Roadway Lighting Series is powered by the Crystal OpticLED platform, and features innovative thermal management design, offering exceptional performance and value. This versatile luminaire can be tailored to the unique specifications of each project. Tool Free Opening Clip, allowing for Top Opening Easy Maintenance. The KINGSTON Streetlight Series is fitted with knife switch safety feature to cut off power supply when the device is open.

Verified by Techlume Australia on 12/04/2023



IP66



SPECIFICATIONS

Material Specifications


| | |
|---------------------------|--|
| Housing | High Pressure Die-Cast Aluminium Alloy, Clear Tempered Glass |
| Finish | Polyester Powder Coat, Signal Black |
| Dimensions | 683mm(L) x 260mm(W) x 109mm(H) |
| Spigot Size | 60mm |
| Ingress Protection | IP66 |
| Impact Rating | IK10 |
| Weight | 6.0kg |
| Mounting Height | 8m - 10m |
| Warranty | 5 Year Replacement |

Electrical Specifications

| | |
|-----------------------------------|-------------------|
| Power Supply | Integrated Driver |
| System Watts | 148.0W |
| Input Voltage | 240VAC, 50/60Hz |
| Operating Temperature (Ta) | -20°C to + 55°C |

Optic Specifications

| | |
|-------------------------------|--------------|
| Light Source | LED SMD 5050 |
| Delivered Lumens | 22,078lm |
| Efficacy | 149lm/W |
| CRI | > 70Ra |
| Reported L70 (Hours) | > 54,000 Hrs |
| Calculated L90 (Hours) | 49,000 Hrs |
| Calculated L70 (Hours) | 79,000 Hrs |

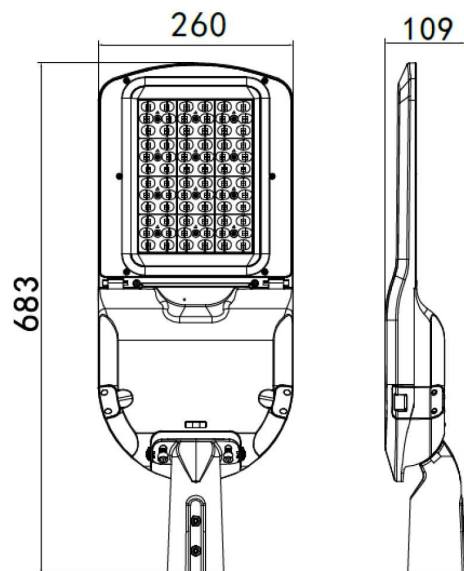

VARIATIONS

| | |
|---------------------|---|
| LC6160-T2-PE | KINGSTON 150W Streetlight w. PE Cell, Signal Black, T2, 4000K, 22,078lm |
| LC6160-T3-PE | KINGSTON 150W Streetlight w. PE Cell, Signal Black, T3, 4000K, 22,078lm |
| LC6160-T4-PE | KINGSTON 150W Streetlight w. PE Cell, Signal Black, T4, 4000K, 22,078lm |
| LC6161-T3-PE | KINGSTON 150W Streetlight w. PE Cell, Signal Black, T3, 3000K |