

# LENNOX 72W

## Asymmetric Floodlight

**Classic Series**

Proven. Quality. Customisable

The LENNOX 72W Linear Lens IP66 Floodlight is the premium series floodlight for professional market. Die-Cast Aluminium for enhanced Dissipation. IP66 Waterproof. Asymmetric Beam Angle, for 100% Forward Throw Light, with no back-light, reducing light pollution and glare. Enhanced corrosion resistance, using AkzoNobel Powder Coating.

Designed for external & industrial applications.



### SPECIFICATIONS

#### Material Specifications


<b>Material</b>	Die-Cast Aluminium Design
<b>Finish</b>	AkzoNobel Powder Coat
<b>Ingress Protection</b>	IP66
<b>Impact Rating</b>	IK08
<b>Dimensions</b>	370 x 265 x 75mm
<b>Weight</b>	5.45kg
<b>Warranty</b>	7 Year Replacement

#### Electrical Specifications

<b>Power Supply</b>	Integrated MeanWell, Non-Dim
<b>Input Voltage</b>	240V; 50/60Hz
<b>Options</b>	DALI, 1-10V available

#### Optic Specifications

<b>Light Source</b>	Lumileds Luxeon SMD 5050
<b>CRI</b>	Ra 83
<b>Colour Deviation</b>	SDCM < 3
<b>Calculated L70 (Hours)</b>	154,000 Hrs
<b>Calculated L80 (Hours)</b>	97,000 Hrs
<b>Calculated L90 (Hours)</b>	46,000 Hrs

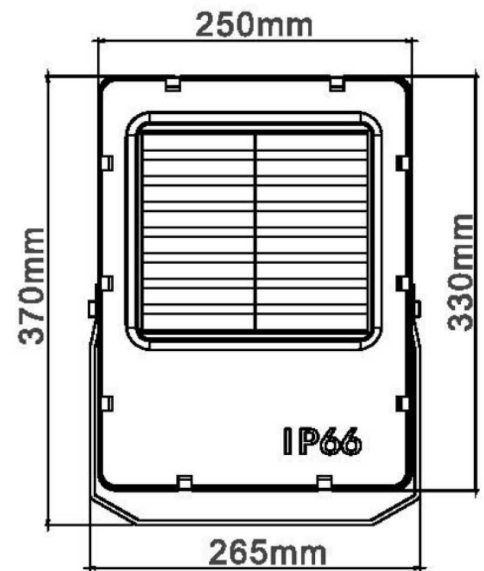

### VARIATIONS

<b>LC2520</b>	LENNOX 72W Floodlight, Black, 90x40°, 3000K, 9,980lm
<b>LC2522</b>	LENNOX 72W Floodlight, Black, 90x40°, 4000K, 10,508lm
<b>LC2524</b>	LENNOX 72W Floodlight, Black, 90x40°, 5700K, 11,030lm