

# LINX 22W

## Linear Downlight Fixed

Classic Series

Proven. Quality. Customisable

The LINX 22W Linear Recessed Downlight is a sleek, low-profile fixed LED downlight. It is a perfect combination of lens and reflector with superior glare control. The secondary reflector is available in black, white, silver and gold for ultimate versatility. Commercial quality, with a five year warranty.

Verified by Techlume Australia on 04/05/2023




IP40



### SPECIFICATIONS

#### Material Specifications

Material	High Grade Aluminium
Colour	White/ Black Insert
Ingress Protection	IP40
Dimensions	290mm(L) x 45mm(W) x 60mm(D)
Cutout	282mm x 37mm
Warranty	5 Year Replacement

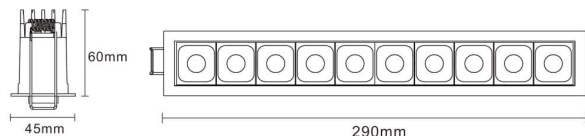

#### Electrical Specifications

Power Supply	Actec Driver, Phase Dim
System Watts	22.7W - 24.1W
Connection Method	Australian 2-Pin Plug & 1.0m Lead
Input Voltage	240V

#### Optic Specifications

Light Source	Osram 20W LED COB
Delivered Lumens	1,860lm (3000K)
Delivered Lumens	1,889lm (4000K)
Efficacy	Up to 83.4lm/W
Beam Angle	24°/ 40°
CRI	Ra 91
Colour Deviation	SDCM ≤ 3
UGR	<19
Rated Lifetime (L70B20)	50,000 Hrs

### VARIATIONS

LC4450	LINX 22W Linear Downlight, White with Black Insert, 40°, Phase Dim, 3000K, 1,860lm
LC4450B	LINX 22W Linear Downlight, Black with Black Insert, 40°, Phase Dim, 3000K, 1,860lm
LC4450W	LINX 22W Linear Downlight, White with White Insert, 40°, Phase Dim, 3000K, 1,860lm
LC4451	LINX 22W Linear Downlight, White with Black Insert, 40°, Phase Dim, 4000K, 1,889lm
LC4451B	LINX 22W Linear Downlight, Black with Black Insert, 40°, Phase Dim, 4000K, 1,889lm
LC4451W	LINX 22W Linear Downlight, White with White Insert, 40°, Phase Dim, 4000K, 1,889lm