


LIQUID 6

Commercial Downlight 160mm

The LIQUID 6, 8-40W Commercial Downlight is an ideal lighting solution for commercial spaces such as schools, hospitals, and corridors. With an IP65 rating, it is suitable for use in wet areas. The light provides a direct output of a 60-degree beam angle and is customisable between 8 and 40W, offering flexibility in the amount of light needed for a specific area. The light features an aluminium diecast housing with a clear diffuser and smooth powder coat white trim finish, giving it a modern and stylish look.



IP65



**CLO
Output**



SPECIFICATIONS

Material Specifications



Material	Aluminium Diecast Housing / Clear Diffuser
Finish	Smooth Powder Coat White Trim
Dimensions	183mm (Face Dia) x 80mm (H)
Cutout	160mm
Ingress Protection	IP65
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Tridonic Fixed Output (NFC Programmable)
Connection Method	Australian Flex & Plug
Operating Temperature (Ta)	-20°C to +45°C

Optic Specifications

Light Source	Philips COB LED
CRI	90+Ra
Delivered Lumens	680lm - 3400lm
Beam Angle	60°
Reported L70 (Hours)	> 50,000 Hrs

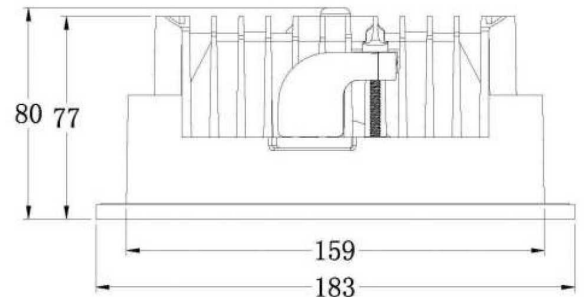

VARIATIONS

DL03-6-27K	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 2700K
DL03-6-3K	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 3000K
DL03-6-35K	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 3500K
DL03-6-4K	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 4000K
DL03-6-5K	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 5000K