


# LIQUID 6

## Commercial Downlight 160mm

The LIQUID 6, 8-40W Commercial Downlight is an ideal lighting solution for commercial spaces such as schools, hospitals, and corridors. With an IP65 rating, it is suitable for use in wet areas. The light provides a direct output of a 60-degree beam angle and is customisable between 8 and 40W, offering flexibility in the amount of light needed for a specific area. The light features an aluminium diecast housing with a clear diffuser and smooth powder coat white trim finish, giving it a modern and stylish look.



**IP65**



**CLO  
Output**



### SPECIFICATIONS

#### Material Specifications



<b>Material</b>	Aluminium Diecast Housing / Clear Diffuser
<b>Finish</b>	Smooth Powder Coat White Trim
<b>Dimensions</b>	183mm (Face Dia) x 80mm (H)
<b>Cutout</b>	160mm
<b>Ingress Protection</b>	IP65
<b>Warranty</b>	5 Year Replacement

#### Electrical Specifications

<b>Power Supply</b>	Tridonic Fixed Output (NFC Programmable)
<b>Connection Method</b>	Australian Flex & Plug
<b>Operating Temperature (Ta)</b>	-20°C to +45°C

#### Optic Specifications

<b>Light Source</b>	Philips COB LED
<b>CRI</b>	90+Ra
<b>Delivered Lumens</b>	680lm - 3400lm
<b>Beam Angle</b>	60°
<b>Reported L70 (Hours)</b>	> 50,000 Hrs

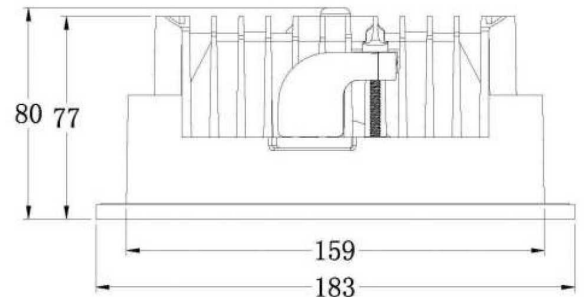

### VARIATIONS

<b>DL03-6-27K</b>	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 2700K
<b>DL03-6-3K</b>	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 3000K
<b>DL03-6-35K</b>	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 3500K
<b>DL03-6-4K</b>	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 4000K
<b>DL03-6-5K</b>	LIQUID 6, 8-40W Commercial Downlight, White, Phase Dim, 5000K