


# LIQUID 8

## Commercial Downlight 200mm

The LIQUID 8-50W Commercial Downlight is used in commercial applications where style and class is important. Used in schools, hospitals, corridors and IP65 Rated for wet areas. Direct output with a 60° beam angle. Customisable output between 8 and 50W.



**IP65**



**CLO  
Output**



### SPECIFICATIONS

#### Material Specifications


<b>Material</b>	Aluminium Die-cast Housing / Clear Diffuser
<b>Finish</b>	Smooth Powder Coat White Trim
<b>Dimensions</b>	226mm (Face Dia) x 96mm (H)
<b>Cutout</b>	200mm
<b>Ingress Protection</b>	IP65
<b>Warranty</b>	5 Year Replacement

#### Electrical Specifications

<b>Power Supply</b>	Tridonic Fixed Output (NFC Programmable)
<b>Connection Method</b>	Australian Flex & Plug
<b>Operating Temperature (Ta)</b>	-20°C to +40°C

#### Optic Specifications

<b>Light Source</b>	CITIZEN COB LED
<b>CRI</b>	90Ra
<b>Beam Angle</b>	60°
<b>Delivered Lumens</b>	680lm - 4250lm
<b>Reported L70 (Hours)</b>	> 50,000 Hrs

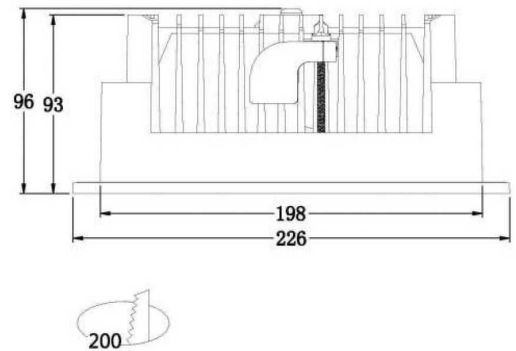

### VARIATIONS

<b>DL03-8-27K</b>	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 2700K
<b>DL03-8-3K</b>	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 3000K
<b>DL03-8-35K</b>	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 3500K
<b>DL03-8-4K</b>	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 4000K
<b>DL03-8-5K</b>	LIQUID 8, 8-50W Commercial Downlight, White, Phase Dim, 5000K