

MODIS-M 20W

Tracklight

The MODIS series is a modular lighting series with an exquisite design and UGR19 anti-glare feature. It supports six installation methods, including recessed, canopy ceiling, surface-mounted, pendant, and track options. With four size choices (Ø55mm, Ø65mm, Ø85mm, Ø100mm), it uses a Bridgelux COB light source, achieving 120lm/W efficiency. It offers interchangeable CCT and wattage (except Ø55mm), multiple reflector angles, and flicker-free drivers. Ideal for commercial and residential spaces, such as hotels, offices, museums, and homes.



IP20



SPECIFICATIONS

Material Specifications


Material	Aluminium & Transparent Tempered Glass
Mounting	Adjustable Track Mount
Colour	Black RAL9005/ White RAL9016
Dimensions	85mm (Dia) x 292mm (H)
Ingress Protection	IP20
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Integral Driver, 500mA, Phase Dimmable
Connection Method	Terminal Block in base
Input Voltage	240V

Optic Specifications

Light Source	Tridonic 20W LED
Delivered Lumens	1,814lm (3000K)
Delivered Lumens	1,975lm (4000K)
Delivered Lumens	1,894lm (5000K)
CRI	Ra >90
Colour Deviation	SDCM ≤ 5
Reported L70 (Hours)	50,000 Hrs

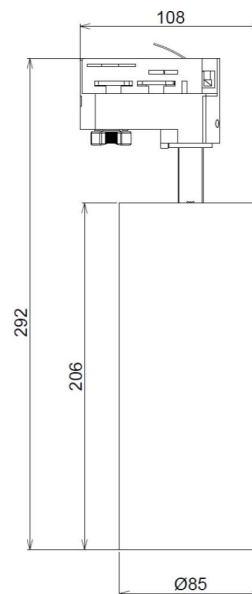

VARIATIONS

LC1496B	MODIS-M 20W Tracklight, Black, 36°, Phase Dim, Tri-Colour, 1700-2650lm
LC1496W	MODIS-M 20W Tracklight, White, 36°, Phase Dim, Tri-Colour, 1700-2650lm