

MODIS-M 25W

Tracklight

The MODIS series is a modular lighting series with an exquisite design and UGR19 anti-glare feature. It supports six installation methods, including recessed, canopy ceiling, surface-mounted, pendant, and track options. With four size choices (Ø55mm, Ø65mm, Ø85mm, Ø100mm), it uses a Bridgelux COB light source, achieving 120lm/W efficiency. It offers interchangeable CCT and wattage (except Ø55mm), multiple reflector angles, and flicker-free drivers. Ideal for commercial and residential spaces, such as hotels, offices, museums, and homes.



SPECIFICATIONS

Material Specifications


| | |
|---------------------------|--|
| Material | Aluminium & Transparent Tempered Glass |
| Mounting | Adjustable Track Mount |
| Colour | Black RAL9005/ White RAL9016 |
| Dimensions | 85mm (Dia) x 292mm (H) |
| Ingress Protection | IP20 |
| Warranty | 5 Year Replacement |

Electrical Specifications

| | |
|--------------------------|--|
| Power Supply | Integral Driver, 500mA, Phase Dimmable |
| Connection Method | Terminal Block in base |
| Input Voltage | 240V |

Optic Specifications

| | |
|--------------------------------------|----------------------------|
| Light Source | Tridonic 25W LED |
| Correlated Colour Temperature | 3-CCT: 3000K/ 4000K/ 5000K |
| Delivered Lumens | 2,150 - 2,350lm |
| CRI | Ra >90 |
| Colour Deviation | SDCM ≤ 5 |
| Calculated L70 (Hours) | 200,000 Hrs |
| Calculated L80 (Hours) | 120,000 Hrs |
| Calculated L90 (Hours) | 56,000 Hrs |

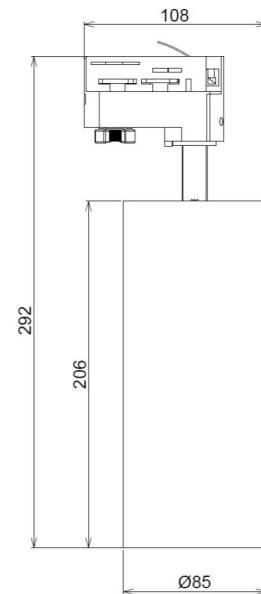

VARIATIONS

| | |
|----------------|--|
| LC1497B | MODIS-M 25W Tracklight, Black, 36°, Phase Dim, Tri-Colour, 2,150 - 2,350lm |
| LC1497W | MODIS-M 25W Tracklight, White, 36°, Phase Dim, Tri-Colour, 2,150 - 2,350lm |