


MODIS-XS 6W

Adjustable Surface Mount Can Light

The MODIS series is a modular lighting series with an exquisite design and UGR19 anti-glare feature. It supports six installation methods, including recessed, canopy ceiling, surface-mounted, pendant, and track options. With four size choices (Ø55mm, Ø65mm, Ø85mm, Ø100mm), it uses a Bridgelux COB light source, achieving 120lm/W efficiency. It offers interchangeable CCT and wattage (except Ø55mm), multiple reflector angles, and flicker-free drivers. Ideal for commercial and residential spaces, such as hotels, offices, museums, and homes.



IP20



SPECIFICATIONS

Material Specifications


Material	Aluminium & Transparent Tempered Glass
Mounting	Adjustable Surface Mount
Colour	Black RAL9005/ White RAL9016
Dimensions	55mm (Dia) x 211mm (H)
Ingress Protection	IP20
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Integral Driver, 500mA, Phase Dimmable
Connection Method	Terminal Block in base
Input Voltage	240V

Optic Specifications

Light Source	Tridonic 6W LED
Delivered Lumens	550-750lm
CRI	Ra >90
Colour Deviation	SDCM ≤ 5
Reported L70 (Hours)	50,000 Hrs

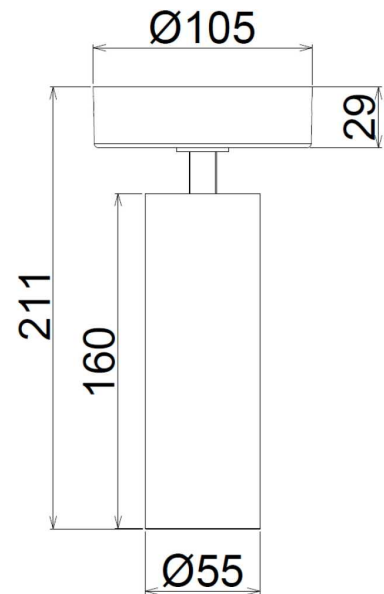

VARIATIONS

LC1423B	MODIS-XS 6W Adjustable Surface Mount Can Light, Black, 36°, Phase Dim, 3000K, 550-750lm
LC1424B	MODIS-XS 6W Adjustable Surface Mount Can Light, Black, 36°, Phase Dim, 4000K, 550-750lm
LC1423W	MODIS-XS 6W Adjustable Surface Mount Can Light, White, 36°, Phase Dim, 3000K, 550-750lm
LC1424W	MODIS-XS 6W Adjustable Surface Mount Can Light, White, 36°, Phase Dim, 4000K, 550-750lm