

MODIS-XS 6W

Recessed Spotlight

The MODIS series is a modular lighting series with an exquisite design and UGR19 anti-glare feature. It supports six installation methods, including recessed, canopy ceiling, surface-mounted, pendant, and track options. With four size choices (Ø55mm, Ø65mm, Ø85mm, Ø100mm), it uses a Bridgelux COB light source, achieving 120lm/W efficiency. It offers interchangeable CCT and wattage (except Ø55mm), multiple reflector angles, and flicker-free drivers. Ideal for commercial and residential spaces, such as hotels, offices, museums, and homes.



IP20



SPECIFICATIONS

Material Specifications


| | |
|---------------------------|--|
| Material | Aluminium & Transparent Tempered Glass |
| Mounting | Recessed |
| Colour | Black RAL9005/ White RAL9016 |
| Dimensions | 55mm (Dia) x 215mm (H) |
| Cutout | 89mm |
| Ingress Protection | IP20 |
| Warranty | 5 Year Replacement |

Electrical Specifications

| | |
|--------------------------|--|
| Power Supply | Integral Driver, 500mA, Phase Dimmable |
| Connection Method | Terminal Block in base |
| Input Voltage | 240V |

Optic Specifications

| | |
|-----------------------------|-----------------|
| Light Source | Tridonic 6W LED |
| Delivered Lumens | 550-750lm |
| CRI | Ra >90 |
| Colour Deviation | SDCM ≤ 5 |
| Reported L70 (Hours) | 50,000 Hrs |

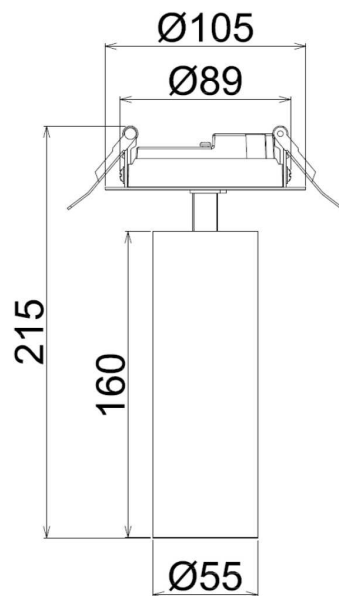

VARIATIONS

| | |
|----------------|---|
| LC1463B | MODIS-XS 6W Recessed Spotlight, Black, 36°, Phase Dim, 3000K, 550-750lm |
| LC1464B | MODIS-XS 6W Recessed Spotlight, Black, 36°, Phase Dim, 4000K, 550-750lm |
| LC1463W | MODIS-XS 6W Recessed Spotlight, White, 36°, Phase Dim, 3000K, 550-750lm |
| LC1464W | MODIS-XS 6W Recessed Spotlight, White, 36°, Phase Dim, 4000K, 550-750lm |