

PERRI 6W

Mini Downlight

Classic Series

Proven. Quality. Customisable

The PERRI 6W Downlight is the smallest downlight in the range. Its petite size, soft curved edge design, and controlled 30° beam angle provide a subtle yet focused spread. Available in black or white housing and equipped with phase-cut dimming for ultimate control, it is often used in hotel applications and spaces with low ceiling cavities. Its deep recessed baffle LED provides complete glare control and visual comfort.



IP44



SPECIFICATIONS

Material Specifications


Housing	Aluminium
Finish	Wet Painted
Dimensions	50.5mm(Dia) x 62mm(H)
Cutout	45mm (Dia)
Ingress Protection	IP44
Warranty	5 Year Replacement

Electrical Specifications

Power Factor	ACTEC 8W Phase Dim, 350mA
Input Voltage	240V
Connection Method	2-Pin Plug & Lead

Optic Specifications

Light Source	Citizen LED 6W
CRI	> 90Ra
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs

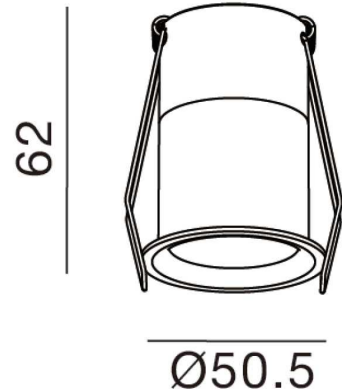

VARIATIONS

LC4670	PERRI 6W Mini Downlight, White, 25°, Phase Dim, 3000K, 450lm
LC4671	PERRI 6W Mini Downlight, Black, 25°, Phase Dim, 3000K, 450lm
LC4672	PERRI 6W Mini Downlight, White, 25°, Phase Dim, 4000K, 480lm
LC4673	PERRI 6W Mini Downlight, Black, 25°, Phase Dim, 4000K, 480lm
LC4674-25	PERRI 6W Mini Downlight, Black, 25°, Phase Dim, 2700K, 430lm