

dynamic series

Efficient. Cutting Edge. Reliable

RAVEN 35W

Exterior Wall Light

The RAVEN flood light series launches as the completely re-engineered LED version of our globally popular wall light. We are using an extrusion production method for the RAVEN series ensuring higher and more accurate heat dissipation. Sleek, angular, technical and powerful lighting solution. RAVEN is suitable for lighting footpaths, car parks, building facades, entrances, under canopies and signs.

Verified by Techlume Australia on 31/05/2023



SPECIFICATIONS

Material Specifications


| | |
|---------------------------|---|
| Material | Aluminium Triangle Extrusion, Polycarbonate |
| Colour | Charcoal Powdercoat |
| Dimensions | 176mm x 134mm x 320mm(L) |
| Ingress Protection | IP54 |
| Impact Rating | IK10 |
| Warranty | 5 Year Replacement |

Electrical Specifications

| | |
|--------------------------|---|
| Power Supply | Tridonic LC 38/700/54 fixC Ip SNC2 (Integral) |
| Input Voltage | 240V |
| Connection Method | Hard Wiring, Large Internal Cavity |

Optic Specifications

| | |
|-----------------------------|----------------------------|
| Light Source | Osram LED 2835, Linear PCB |
| Delivered Lumens | 2,845lm (3000K) |
| Delivered Lumens | 3,392lm (4000K) |
| Delivered Lumens | 2,959lm (6000K) |
| Beam Angle | 90° |
| CRI | >83Ra |
| Colour Deviation | SDCM ≤ 3 |
| Reported L70 (Hours) | > 54,000 Hrs |

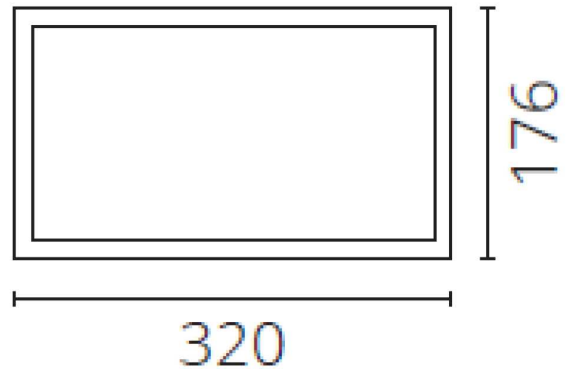

VARIATIONS

| | |
|---------------|--|
| LC4231 | RAVEN 35W Outdoor Floodlight 300mm, Charcoal, 90°, Non-Dim, Tri-colour |
|---------------|--|