

# RONAN 40W

## Exterior Wall Light

dynamic series

Efficient. Cutting Edge. Reliable

The RONAN 40W outdoor slim wall light is a durable option for upgrading traditional Slim Wall Pack light fixtures. Made with aluminium triangle extrusion and polycarbonate with a black powder coat, the light is weather-resistant and long-lasting. This light is easy to install and requires minimal maintenance, while its low-profile design makes it ideal for outdoor spaces that require lighting without being too obtrusive, and its asymmetric optic makes it dark sky friendly.



### SPECIFICATIONS

#### Material Specifications


|                           |                                   |
|---------------------------|-----------------------------------|
| <b>Material</b>           | Die-Cast Aluminium, Polycarbonate |
| <b>Colour</b>             | Black Powdercoat                  |
| <b>Dimensions</b>         | 282mm (L) x 125mm (D) x 205mm (H) |
| <b>Ingress Protection</b> | IP66                              |
| <b>Impact Rating</b>      | IK08                              |
| <b>Warranty</b>           | 5 Year Replacement                |
| <b>Options</b>            | PE Cell (special orders)          |

#### Electrical Specifications

|                                   |                                    |
|-----------------------------------|------------------------------------|
| <b>Power Supply</b>               | Integral                           |
| <b>Operating Temperature (Ta)</b> | -30°C to +45°C                     |
| <b>Input Voltage</b>              | 240V                               |
| <b>Connection Method</b>          | Hard Wiring, Large Internal Cavity |

#### Optic Specifications

|                             |                            |
|-----------------------------|----------------------------|
| <b>Light Source</b>         | Osram LED 2835, Linear PCB |
| <b>Optics</b>               | T3                         |
| <b>Delivered Lumens</b>     | 5000lm                     |
| <b>Efficacy</b>             | 125lm/w                    |
| <b>CRI</b>                  | > 80Ra                     |
| <b>Colour Deviation</b>     | SDCM ≤ 3                   |
| <b>Reported L70 (Hours)</b> | > 54,000 Hrs               |

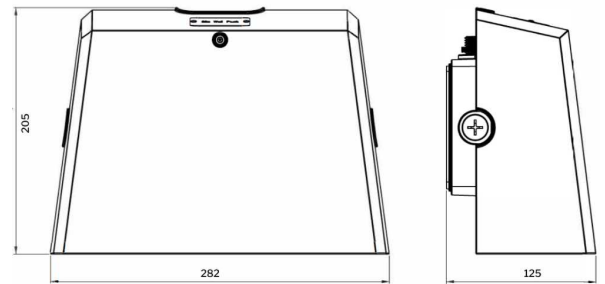

### VARIATIONS

|               |   |
|---------------|---|
| <b>LC4275</b> | RONAN 40W Outdoor Floodlight, Black, T3, Non-Dim, 4000K |
| <b>LC4276</b> | RONAN 40W Outdoor Floodlight, Black, T3, Non-Dim, 3000K |