

RYLAND 145W

Circular Pendant 2000mm

Classic Series

Proven. Quality. Customisable



IP44

SPECIFICATIONS

Material Specifications



| | |
|---------------------------|--|
| Material | Aluminium |
| Finish | White/ Black |
| Dimensions | Ø2000mm x 60mm(W) x 80mm(H) |
| Suspension Length | 2.0m adjustable (3 x required per fitting) |
| Ingress Protection | IP44 |
| Warranty | 5 Year Replacement |

Electrical Specifications

| | |
|--------------------------|--|
| Power Supply | Osram Integrated Driver, Non-Dim |
| Options | DALI Available |
| Input Voltage | 240V |
| Connection Method | Single Cable required, to Canopy Mount |

Optic Specifications

| | |
|-------------------------|------------------|
| Light Source | Direct Beam, 93° |
| CRI | 82Ra |
| Efficacy | 97lm/W |
| Delivered Lumens | 14,065lm |
| UGR | < 19 |

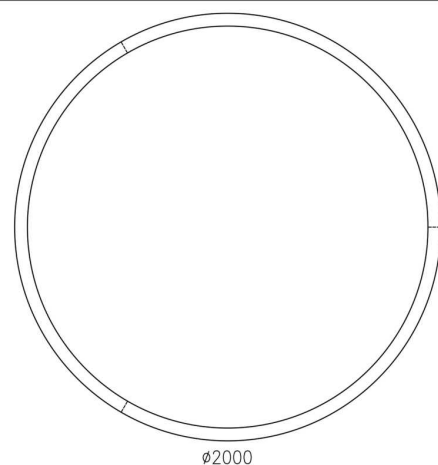

VARIATIONS

| | |
|----------------|--|
| LC3290 | RYLAND 145W Circular Pendant, Black, Non-Dim, 3000K |
| LC3291 | RYLAND 145W Circular Pendant, Black, Non-Dim, 4000K |
| LC3291D | RYLAND 145W Circular Pendant, Black, DALI Dim, 4000K |
| LC3292 | RYLAND 145W Circular Pendant, White, Non-Dim, 3000K |
| LC3293 | RYLAND 145W Circular Pendant, White, Non-Dim, 4000K |