

dynamic series

Efficient. Cutting Edge. Reliable

TITAN 20W

Weatherproof Emergency Batten 650mm

The TITAN 20W Emergency Batten 650mm has been introduced as a premium quality batten, high-efficiency, and very easy to install. Polycarbonate body with durable seal and clear polycarbonate lens. Resists impact (IK08) and IP66 - designed for harsh environments. Excellent for Commercial applications including schools, car parks, security purposes, and public buildings. The robust construction shields the high output LED technology to maintain maximum light output and lamp life.

SS316 Clips available.



SPECIFICATIONS

Material Specifications


Housing	Grey Moulded PC Body, Clear PC Diffuser
Material	304 Stainless Clips
Dimensions	650mm(L) x 97mm(W) x 82mm(H)
Impact Rating	IK08
Ingress Protection	IP66
Weight	1.3kg
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Tridonic 25W Non-Dim Driver 350mA (Internal)
Input Voltage	240V 50/60Hz
Connection Method	20mm Cable Gland at One end. 3 knock-out points in rear, and 1 in side.
Operating Temperature (Ta)	-20°C to +40°C

Optic Specifications

Light Source	LG LEMWS28R80 Series
Delivered Lumens	2140lm
CRI	> 80Ra
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs
Calculated L70 (Hours)	134,000 Hrs
AS2293 Classification	C0:D40, C90:D20

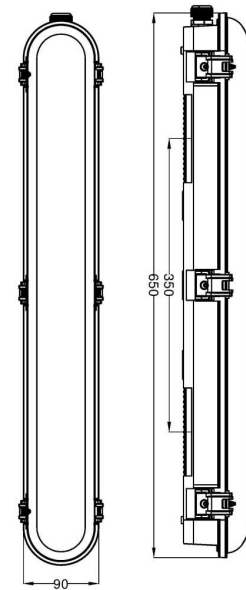

VARIATIONS

LC5314	TITAN 20W Emergency Weatherproof Batten 650mm, 120°, Non-Dim, 4000K
LC5314D	TITAN 20W Emergency Weatherproof Batten 650mm, 120°, DALI, 4000K