

TITAN 20W

Weatherproof Batten 650mm


dynamic series

Efficient. Cutting Edge. Reliable

The TITAN Weatherproof batten, has been introduced as a premium quality batten, high-efficiency, and very easy to install. Polycarbonate body with durable seal and clear polycarbonate lens. Resists impact (IK08) and IP66 - designed for harsh environments. Excellent for Commercial applications including schools, car parks, security purposes, and public buildings. The robust construction shields the high output LED technology to maintain maximum light output and lamp life.

SS316 Clips available.

Verified by Techlume Australia on 19/05/2023



IP66



SPECIFICATIONS

Material Specifications


Housing	Grey Moulded PC Body, Clear PC Diffuser
Material	304 Stainless Clips
Dimensions	650mm(L) x 97mm(W) x 82mm(H)
Impact Rating	IK08
Ingress Protection	IP66
Weight	1.1kg
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Tridonic LC_25-350_71 fixC SR SNC2 (Integral)
System Watts	18.6W
Input Voltage	240V 50/60Hz
Connection Method	20mm Cable Gland at One end. 3 knock-out points in rear, and 1 in side.
Operating Temperature (Ta)	-20°C to +40°C

Optic Specifications

Light Source	LG LEMWS28R80 Series
Delivered Lumens	2457lm
Efficacy	132lm/W
CRI	85Ra
Colour Deviation	SDCM ≤ 3
Calculated L70 (Hours)	134,000 Hrs

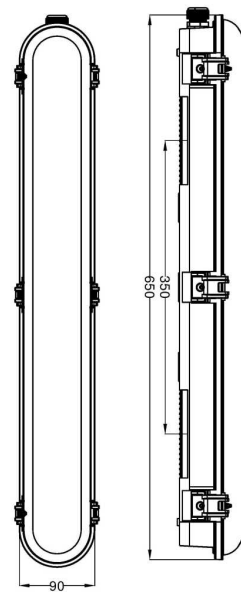

VARIATIONS

LC5310	TITAN 20W Weatherproof Batten 650mm, 120°, Non-Dim, 4000K, 2457lm
LC5310D	TITAN 20W Weatherproof Batten 650mm, 120°, DALI, 4000K, 2457lm
LC5311	TITAN 20W Weatherproof Batten 650mm, 120°, Motion Sensor, 4000K, 2457lm