

TITAN 30W

Weatherproof Emergency Batten 1220mm

The TITAN Emergency Weatherproof batten has been introduced as a premium quality batten, high-efficiency, and very easy to install. IP66, designed for harsh environments. Mounting clips include an optional attachment to allow for the luminaire to be suspension mounted. NATA tested to C0-D40 C90-D25.



SPECIFICATIONS

Material Specifications


| | |
|---------------------------|--------------------------------------|
| Housing | Moulded PC Body, Clear PC cover |
| Material | 304 Stainless Steel Clips |
| Impact Rating | IK08 |
| Ingress Protection | IP66 |
| Dimensions | 1220mm(L) x 97mm(W) x 82mm(H) |
| Weight | 1.7kg |
| Warranty | 5 Year Replacement (Battery 2 Years) |

Electrical Specifications

| | |
|-------------------------------------|---|
| Power Supply | Tridonic 38W ADV Non-Dim Driver 500mA (Integrated) |
| Input Voltage | 240V |
| Operating Temperature (Ta) | -20°C to +40°C |
| Connection Method | 20mm Cable Gland at One end. 3 knock-out points in rear, and 1 in side. |
| Battery & Charger System | Maintained Em. Kit 3 Hr Response Time. Batt. Charge Time: 24 Hrs |
| Mode of Operation | Maintained |
| Testing Facility | Manual Test Switch |
| Indicators | Battery Charger Green LED |

Optic Specifications

| | |
|-------------------------------|--|
| Light Source | 30W LG LEMWS28R80 Series, 3W Emergency Standby |
| Delivered Lumens | 3210lm (315lm) |
| CRI | > 80Ra |
| Colour Deviation | SDCM ≤ 3 |
| AS2293 Classification | C0-D40 C90-D25 |
| Reported L70 (Hours) | > 54,000 Hrs |
| Calculated L70 (Hours) | 134,000 Hrs |

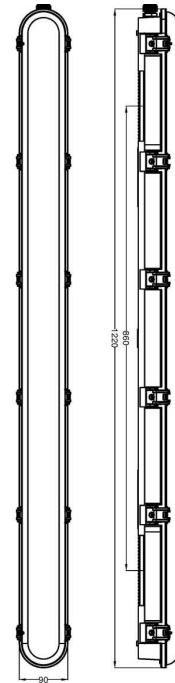

VARIATIONS

| | |
|------------------|--|
| LC5316 | TITAN 30W Weatherproof Emergency Batten, 120°, Non-Dim, 4000K |
| LC5316D | TITAN 30W Weatherproof Emergency Batten, 120°, DALI, 4000K |
| LC5316-RB | TITAN 30W Weatherproof Emergency Batten w. Remote Box for Freezers, 120°, Non-Dim, 4000K |