


TITAN 30W

Emergency Batten 1220mm with Motion Sensor

dynamic series

Efficient. Cutting Edge. Reliable

The TITAN Emergency batten has been introduced as a premium quality batten, high-efficiency, and very easy to install. IP66, designed for harsh environments. The TITAN LED weatherproof series is an energy-efficient luminaire range that offers an efficient and effective solution for industrial environments that require protection against moisture and dust. Also available with motion sensors and emergency kits. Stainless Steel 316 Clips available.



IP66



SPECIFICATIONS

Material Specifications


Housing	Grey Moulded PC Body, Clear PC Diffuser
Material	304 Stainless Clips (Supplied with 4 Anti-Tamper Screws)
Impact Rating	IK08
Ingress Protection	IP66
Dimensions	1220mm(L) x 97mm(W) x 82mm(H)
Weight	1.7kg
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	Tridonic 38W Non-Dim Driver 500mA (Internal)
Input Voltage	240V 50/60Hz
Operating Temperature (Ta)	-20°C to +40°C
Connection Method	20mm Cable Gland at One end. 3 knock-out points in rear, and 1 in side.
Battery & Charger System	Maintained Em. Kit 3 Hr Response Time. Batt. Charge Time: 24 Hrs
Mode of Operation	Maintained
Testing Facility	Manual Test Switch
Indicators	Battery Charger Green LED

Optic Specifications

Light Source	LG LEMWS28R80 Series, 3W Emergency Standby
Delivered Lumens	3652lm (4000K) (315lm)
CRI	> 80Ra
Colour Deviation	SDCM ≤ 3
AS2293 Classification	C0-D40 C90-D25
Reported L70 (Hours)	> 54,000 Hrs
Calculated L70 (Hours)	134,000 Hrs

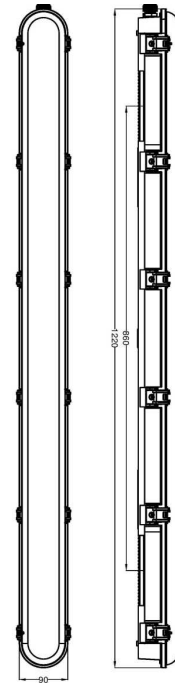

VARIATIONS

LC5318	TITAN 30W Emergency Weatherproof Batten, 120°, Motion Sensor, 4000K, 3652lm
---------------	---