

# TITAN 45W

## Weatherproof Emergency Batten 1220mm

**dynamic series**

Efficient. Cutting Edge. Reliable

The TITAN Emergency Weatherproof Batten has been introduced as a premium quality batten with high-efficiency. With an IP66 rating, it can withstand harsh environments. It is supplied with stainless steel mounting clips for easy installation without compromising its IP66 integrity. Also available with motion sensors and in standard weatherproof options. NATA Certified C0-D80 C90-D50.



### SPECIFICATIONS

#### Material Specifications


<b>Housing</b>	Moulded PC Body, Clear PC cover
<b>Material</b>	304 Stainless Clips
<b>Dimensions</b>	1220mm(L) x 97mm(W) x 82mm(H)
<b>Impact Rating</b>	IK08
<b>Ingress Protection</b>	IP66
<b>Weight</b>	2.0kg
<b>Warranty</b>	5 Year Replacement (Battery 2 Years)

#### Electrical Specifications

<b>Power Supply</b>	Tridonic 50W Non-Dim Driver, 350mA (240 pcs)
<b>Connection Method</b>	20mm Cable Gland at One end. 3 knock-out points in rear, and 1 in side.
<b>Operating Temperature (Ta)</b>	-20°C to +40°C
<b>Input Voltage</b>	240V
<b>Battery &amp; Charger System</b>	Maintained Em. Kit 3 Hr Response Time. Batt. Charge Time: 24 Hrs, 4.5W Emergency Standby (587lm)
<b>Mode of Operation</b>	Maintained
<b>Testing Facility</b>	Manual Test Switch
<b>Indicators</b>	Battery Charger Green LED

#### Optic Specifications

<b>Light Source</b>	LG LEMWS28R80 Series
<b>Delivered Lumens</b>	5680m
<b>CRI</b>	80Ra
<b>Beam Angle</b>	120°
<b>Colour Deviation</b>	SDCM ≤ 3
<b>AS2293 Classification</b>	C0-D80 C90-D50
<b>Reported L70 (Hours)</b>	> 54,000 Hrs
<b>Calculated L70 (Hours)</b>	134,000 Hrs

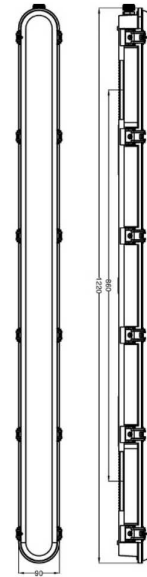

### VARIATIONS

<b>LC5321</b>	TITAN 45W Weatherproof Emergency Batten, Non-Dim, 4000K, 5680lm
---------------	---