

dynamic series

Efficient. Cutting Edge. Reliable

TITAN 45W

Weatherproof Emergency Batten 1220mm

The TITAN Emergency Weatherproof Batten has been introduced as a premium quality batten with high-efficiency. With an IP66 rating, it can withstand harsh environments. It is supplied with stainless steel mounting clips for easy installation without compromising its IP66 integrity. Also available with motion sensors and in standard weatherproof options. NATA Certified C0-D80 C90-D50.



SPECIFICATIONS

Material Specifications


Housing	Moulded PC Body, Clear PC cover
Material	304 Stainless Clips
Dimensions	1220mm(L) x 97mm(W) x 82mm(H)
Impact Rating	IK08
Ingress Protection	IP66
Weight	2.0kg
Warranty	5 Year Replacement (Battery 2 Years)

Electrical Specifications

Power Supply	Tridonic 50W Non-Dim Driver, 350mA (240 pcs)
Connection Method	20mm Cable Gland at One end. 3 knock-out points in rear, and 1 in side.
Operating Temperature (Ta)	-20°C to +40°C
Input Voltage	240V
Battery & Charger System	Maintained Em. Kit 3 Hr Response Time. Batt. Charge Time: 24 Hrs, 4.5W Emergency Standby (587lm)
Mode of Operation	Maintained
Testing Facility	Manual Test Switch
Indicators	Battery Charger Green LED

Optic Specifications

Light Source	LG LEMWS28R80 Series
Delivered Lumens	5,680lm
CRI	80Ra
Beam Angle	120°
Colour Deviation	SDCM ≤ 3
AS2293 Classification	C0-D80 C90-D50
Reported L70 (Hours)	> 54,000 Hrs
Calculated L70 (Hours)	134,000 Hrs

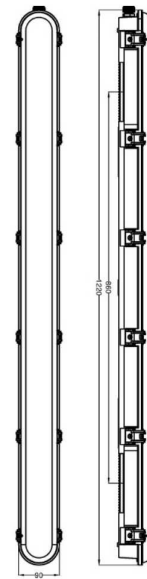

VARIATIONS

LC5321	TITAN 45W Weatherproof Emergency Batten, Non-Dim, 4000K, 5680lm
---------------	---