



TECHLUME

A U S T R A L I A

LM-79 Test Report

Testing Method:	IES Approved Method: Electrical and Photometric Measurements of Solid-State Lighting Products
Relevant Standards:	IES LM-79-08
Test Date and Time:	18/04/2023 3:25:06 PM
Test Location:	Techlume Australia - East Goderich Street Deloraine, TAS 7304
Operator:	Johnny Elmer
Measurement Number:	VFR-230418-0057-MS
Measurement Method:	Far Field, Type C Horizontal
Measurement Distance:	453.3 cm

Equipment Used

System Name:	LabSpion Goniometer
Sensor Name / Model:	Viso LabSensor Model2 / Freedom VIS (Custom Viso)
Spectrometer Range:	360 nm – 830 nm
Calibration Date:	7/12/2022
Flicker Meter Type:	Viso Systems LabFlicker
Manufacturer:	Viso Systems, Denmark

Test Conditions

Ambient Temperature:	25 °C ± 1 °C
----------------------	--------------

Remarks

The results stated in this report represent the tested sample only. All photometric and colourimetric data has been measured in compliance with IES LM-79-08 standards.



Product Overview

Product Description:


LAWSON MK-II 100W Surface Mount Canopy Light, White, 4000K, 382mmx382mm, Non-Dim

Item Number:

LC2850

Manufacturer:

Decrolux Lighting Pty Ltd

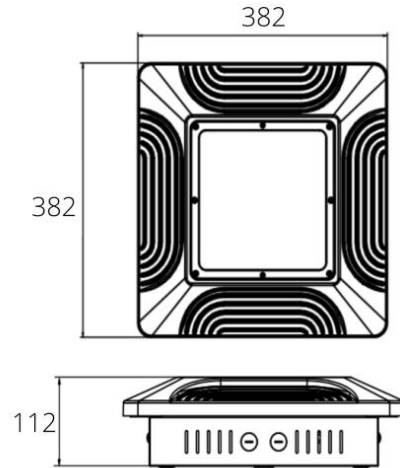

Photometric Measurements

Total Luminous Flux	Luminous Efficacy	Luminous Intensity
17797 lm	164 Lumen/watt	6467 cd

Correlated Colour Temperature, Target	Correlated Colour Temperature, Measured	Colour Rendering Index (CRI)
4000 K	4034 K	Ra 81.4


Electrical Measurements

Input Voltage	Input Current	Input Power	Input Voltage Frequency
240 VAC	0.464 A	108.7 W	60 Hz


Power Factor	Stabilisation Time	Stabilisation Variation	Hours Operated Prior to Test
0.98	Not completed	0.0%	0 hours



Spectral Power Distribution (SPD)

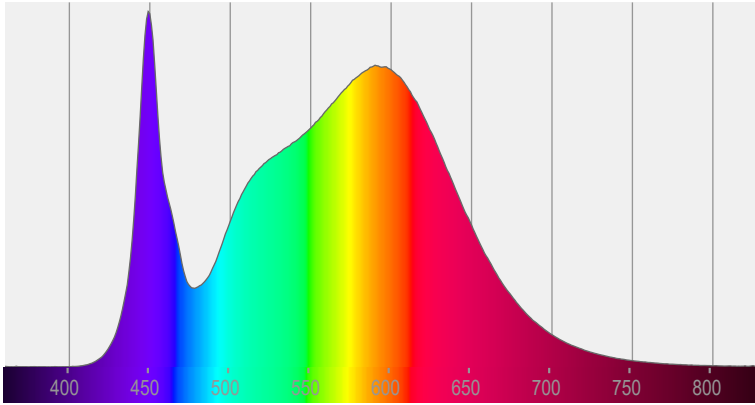

Input Power Curve

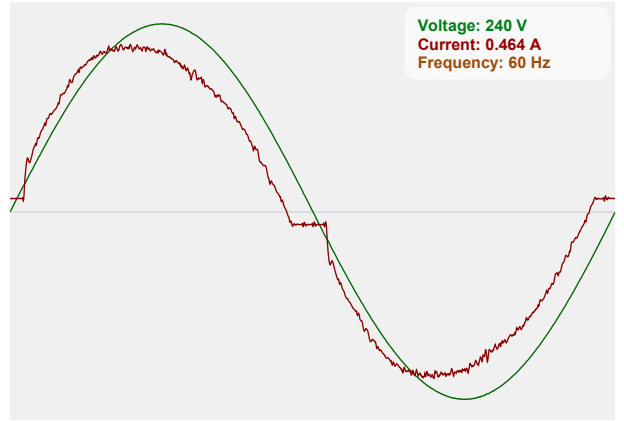


Flicker Details

Flicker Sample Rate	Flicker Percentage	Flicker Frequency	Flicker Index
20000 sample/s	0.06%	121.21 Hz	0


Flicker SVM Value	Flicker PstLM Value	Measurement Time (PstLM)	Measurement Time (all other indices)
0	0	180 s	1.2 s

IEEE 1789 Frequency/Modulation Plot

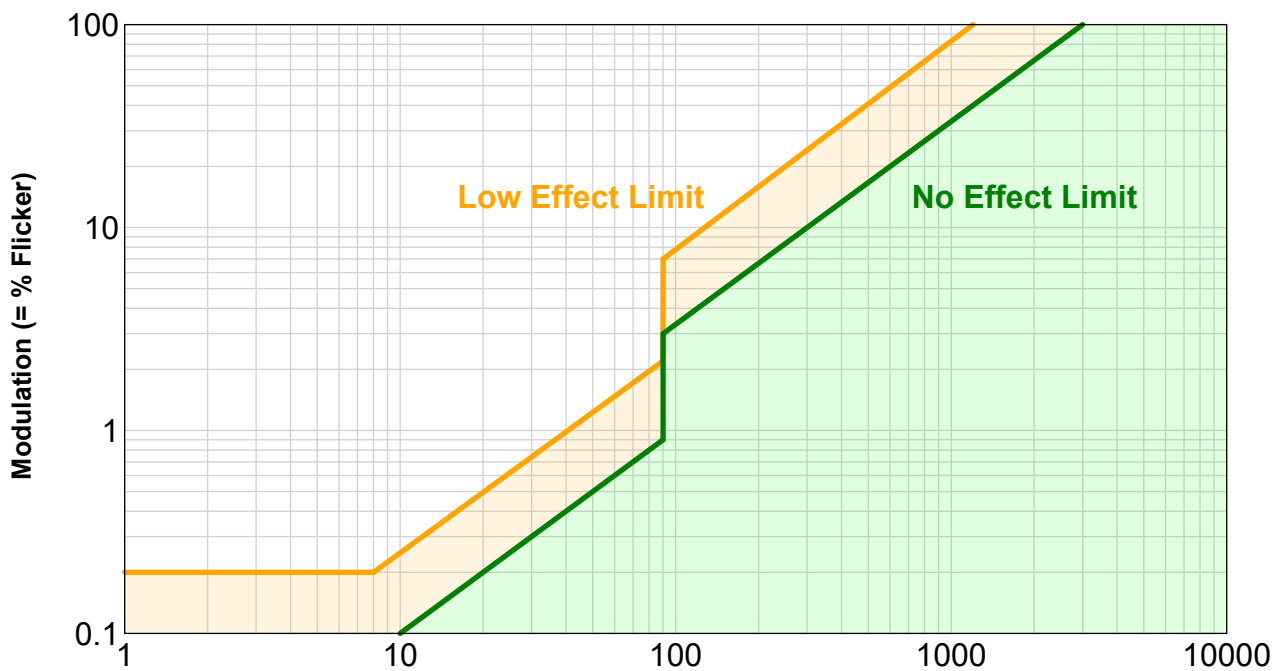

Angular Distribution – 0° / 90° Plane



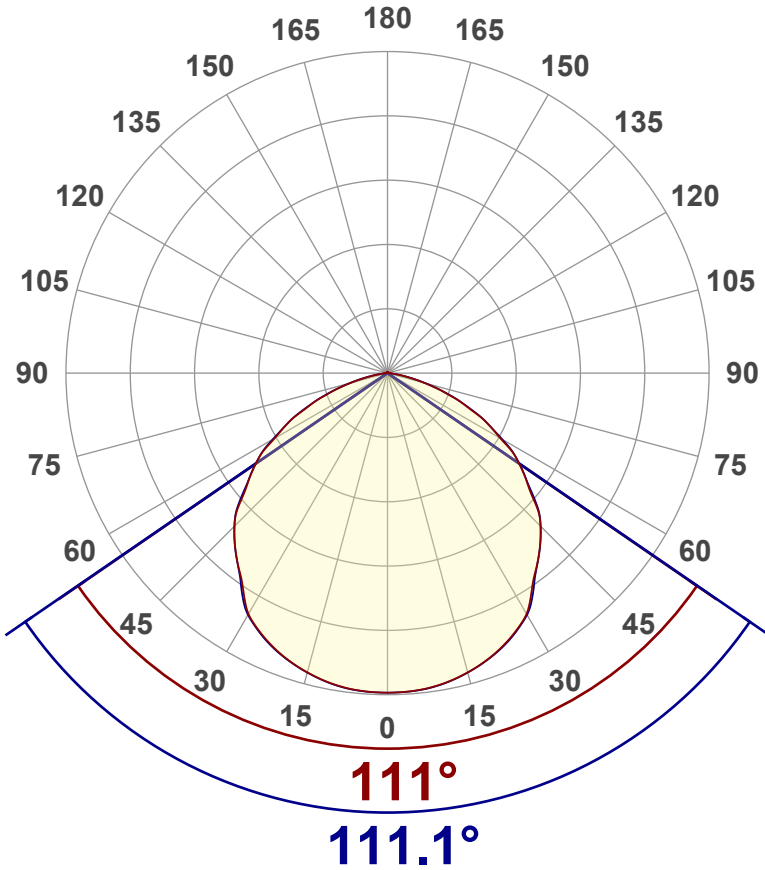

Main Values

Total Lumen Output	17797 lm
Lumen Up%	0.54%
Lumen Down%	99.46%
Peak Intensity	6467 cd
Beam Angle (90%)	111.1°

Cut-off Angle

Average 2.5%	165.6°
--------------	--------

Field Angle


Average 10%	152.6°
-------------	--------

Intensity Ratio

In 120° Cone	82.7%
In 90° Cone	56.8%

C000-C180

C090-C270

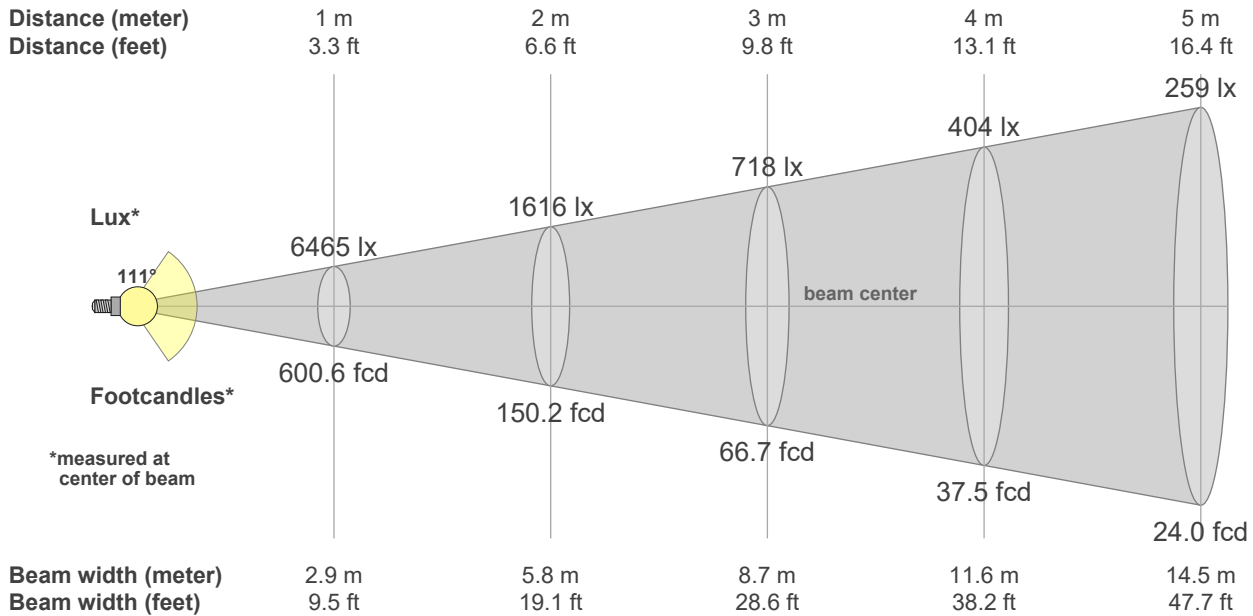

Beam intensities from 1 – 20m

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	m
3.3	6.6	9.8	13.1	16.4	19.7	23	26.2	29.5	32.8	36.1	39.4	42.7	45.9	49.2	52.5	55.8	59.1	62.3	65.6	ft
6465	1616	718	404	259	180	132	101	80	65	53	45	38	33	29	25	22	20	18	16	lux
600.6	150.	66.7	37.5	24	16.7	12.3	9.4	7.4	6	5	4.2	3.6	3.1	2.7	2.3	2.1	1.9	1.7	1.5	fc




Colour Rendering Index (CRI)	Colour Rendering Index R9 Value	Colour Rendering TM30-18
Ra 81.4	R9 = -1.5	Rf 83.2, Rg 95.0

Colour Quality Scale	Correlated Colour Temperature, Target	Correlated Colour Temperature, Measured
CQS = 81.1	CCT = 4000 K	CCT = 4034 K

MacAdam Steps	Colour Coordinates CIE 1931	Colour Deviation from BBL
SDCM = 1.7	(x;y) = (0.381;0.377)	Duv = 0.0021


Colour Rendering Index per reference colour (CIE 1995)

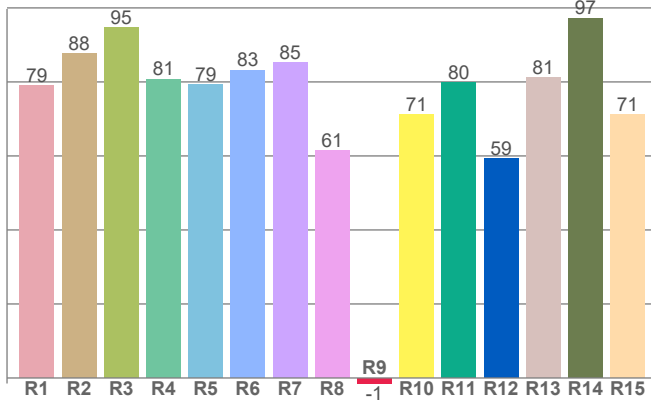

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
79.0	87.6	94.6	80.7	79.2	83.1	85.3	61.4	-1.5	71.1	79.8	59.3	81.1	97.2	71.1


TM30-18 Rf-values per hue bin

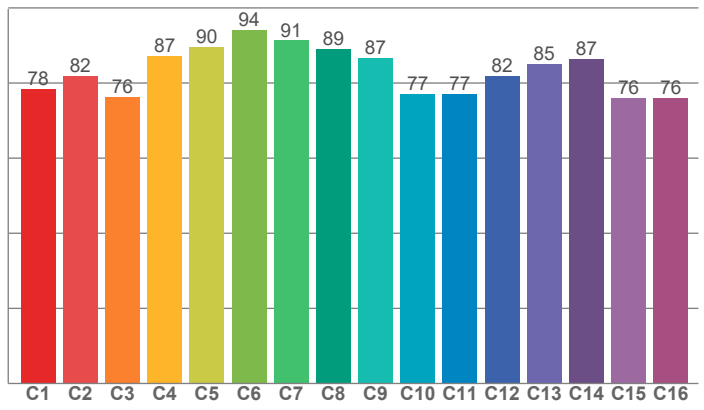


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
78.4	81.9	76.3	87.2	89.7	94.2	91.3	89.0	86.7	77.2	77.1	81.8	85.0	86.5	76.0	76.0


CIE 1931

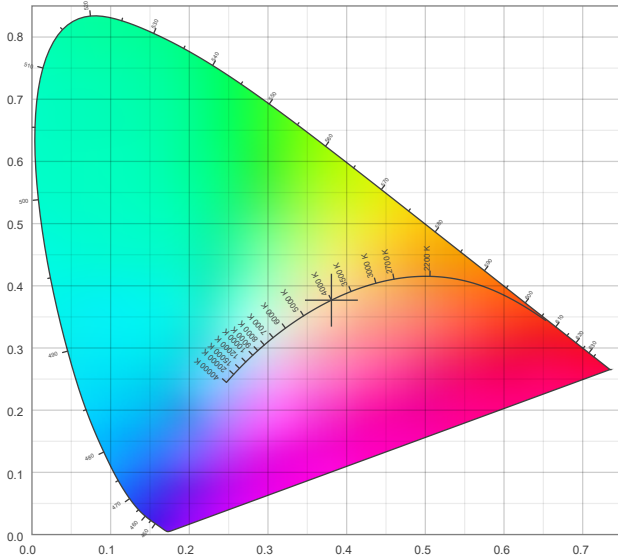

CIE 1931 – Zoomed

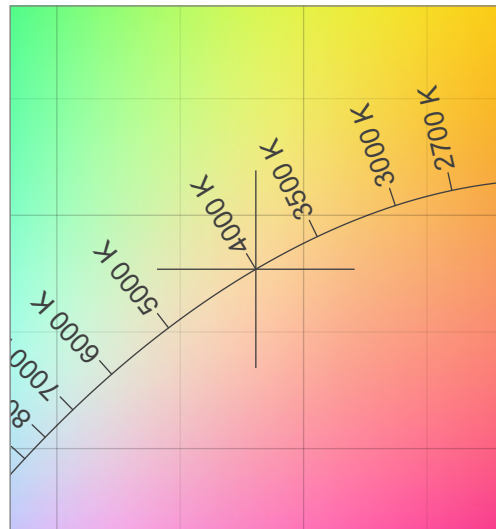


Iso-intensity Diagram (Iso-Candela)

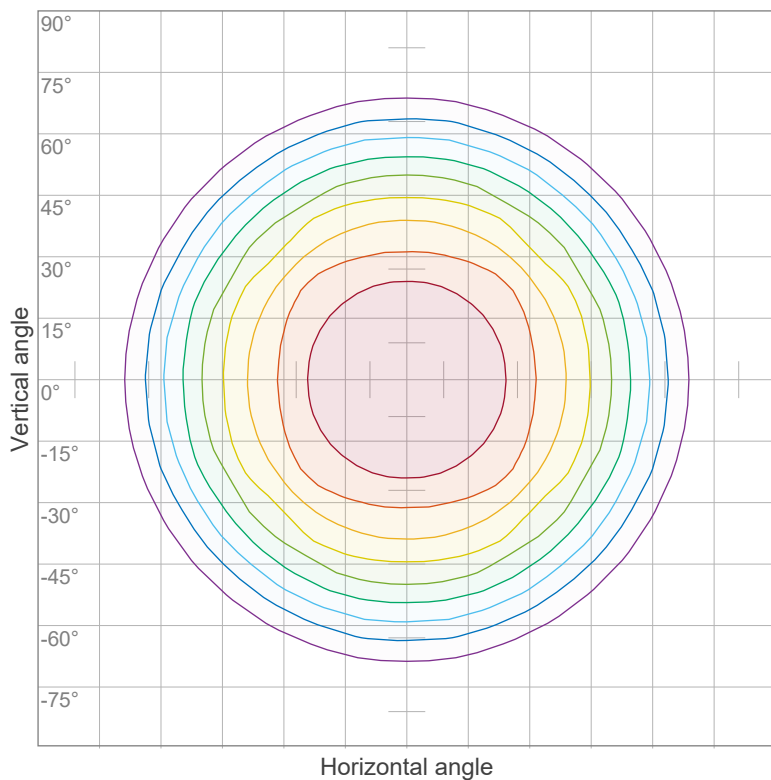

90 %	5818.7 cd
80 %	5172.2 cd
70 %	4525.7 cd
60 %	3879.1 cd
50 %	3232.6 cd
40 %	2586.1 cd
30 %	1939.6 cd
20 %	1293.0 cd
10 %	646.5 cd

Peak intensity: 6465.2 cd
Number of c-planes: 36

Iso-illuminance Diagram (Iso-lux)

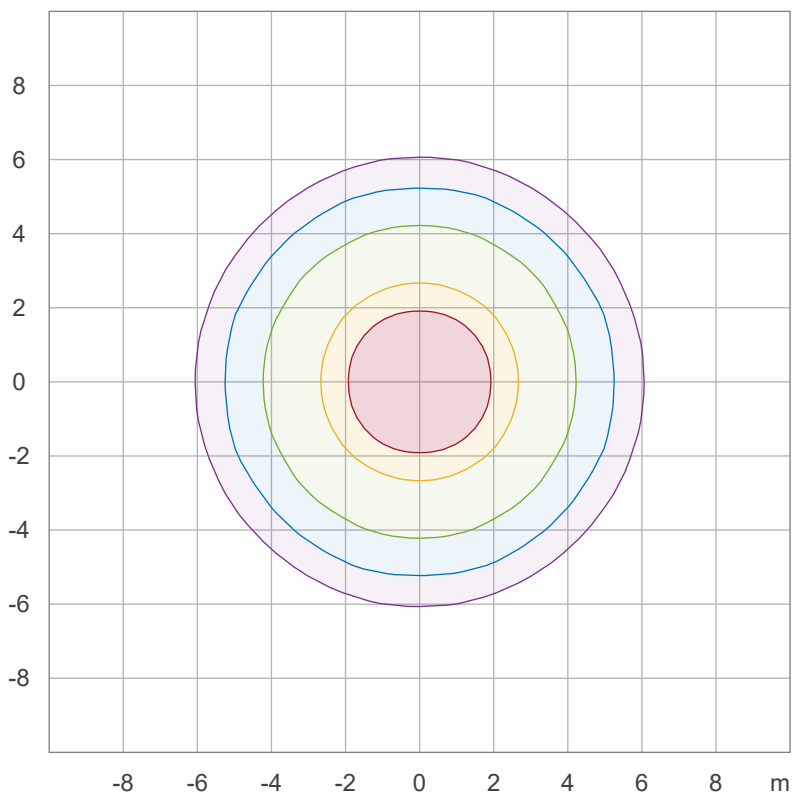

50.0 %	359.2 lx
30.0 %	215.5 lx
10.0 %	71.8 lx
5.0 %	35.9 lx
3.0 %	21.5 lx

Peak illuminance: 718.3 lx
Mounting height: 3.0 m
Number of c-planes: 36



Light Planning – UGR table

Uncorrected, comprehensive UGR table according to 117-1995

Reflectances		70	70	50	50	30	70	70	50	50	30
ρ Ceiling		70	70	50	50	30	70	70	50	50	30
ρ Walls		50	30	50	30	30	50	30	50	30	30
ρ Floor		20	20	20	20	20	20	20	20	20	20
Room size		Viewed Crosswise					Viewed Endwise				
H = mounting height above eye level		(Viewing direction orthogonal to lamp length axis)					(Viewing direction parallel to lamp length axis)				
X	Y										
2H	2H	29.4	30.6	29.6	30.9	31.1	29.4	30.6	29.6	30.9	31.1
	3H	30.3	31.6	30.8	31.8	32.1	30.4	31.6	30.8	31.9	32.1
	4H	30.6	31.8	31.0	32.1	32.3	30.6	31.8	31.0	32.1	32.3
	6H	30.8	31.8	31.1	32.1	32.4	30.8	31.8	31.1	32.1	32.5
	8H	30.7	31.7	31.1	32.0	32.5	30.8	31.7	31.1	32.0	32.5
	12H	30.7	31.6	31.1	32.0	32.4	30.7	31.6	31.1	32.0	32.5
4H	2H	29.8	30.9	30.2	31.2	31.5	29.8	31.0	30.2	31.2	31.5
	3H	31.0	32.0	31.4	32.3	32.8	31.0	32.0	31.4	32.3	32.8
	4H	31.3	32.2	31.7	32.6	33.1	31.3	32.2	31.7	32.6	33.1
	6H	31.4	32.2	31.9	32.6	33.0	31.4	32.2	31.9	32.6	33.0
	8H	31.4	32.2	31.9	32.5	32.9	31.4	32.2	31.9	32.5	32.9
	12H	31.4	32.0	31.9	32.4	32.9	31.4	32.0	31.9	32.4	32.9
8H	4H	31.4	32.1	31.9	32.5	32.9	31.4	32.1	31.9	32.5	32.9
	6H	31.5	32.1	32.0	32.6	33.1	31.5	32.1	32.0	32.6	33.1
	8H	31.6	32.1	32.1	32.6	33.2	31.6	32.1	32.1	32.6	33.2
	12H	31.5	32.0	32.1	32.5	33.1	31.5	32.0	32.1	32.5	33.1
12H	4H	31.3	31.9	31.8	32.4	32.9	31.3	31.9	31.8	32.4	32.9
	6H	31.5	32.0	32.1	32.5	33.2	31.5	32.0	32.1	32.5	33.2
	8H	31.5	32.0	32.1	32.5	33.1	31.5	32.0	32.1	32.5	33.1
Variations with the observer position for the luminaire spacings, S:											
S = 1.0H		0.1 / -0.2					0.1 / -0.2				
S = 1.5H		0.4 / -0.6					0.4 / -0.6				
S = 2.0H		1.0 / -1.5					1.0 / -1.5				

NOTE: An asymmetry correction has been applied to the beam distribution of this measurement in order to accurately calculate UGR.

Coefficients of Utilization

Ceiling reflectance	80			70			50			30			10			0		
Wall reflectance	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
Floor reflectance	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	20	0
RCR		(RCR: Room Cavity Ratio)						Room Values are expressed as percentage of Lumen delivered to the task surface										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	99
1	109	105	101	98	107	103	99	96	98	96	93	94	92	90	91	89	87	85
2	100	92	86	80	97	90	84	79	87	82	77	83	79	76	80	77	74	72
3	91	81	73	67	89	80	72	67	77	70	65	74	69	64	71	67	63	61
4	84	72	64	57	81	71	63	57	68	61	56	66	60	55	64	58	54	52
5	77	64	56	49	75	63	55	49	61	54	48	59	53	48	57	52	47	45
6	71	58	49	43	69	57	49	43	55	48	42	54	47	42	52	46	42	40
7	66	53	44	38	64	52	44	38	50	43	38	49	42	37	47	41	37	35
8	61	48	40	34	60	47	39	34	46	39	34	45	38	33	43	38	33	31
9	57	44	36	30	56	43	36	30	42	35	30	41	35	30	40	34	30	28
10	54	41	33	28	52	40	33	28	39	32	27	38	32	27	37	31	27	25

