

ASTON MK-II 52W

Suspended Profile 1961mm

Classic Series

Proven. Quality. Customisable

The ASTON MK-II Linear Pendant Series are a sleek, modern style perfect for commercial architecture. Architectural linear suspensions bring clean lines to commercial interiors. Our sleek, stylish LED linear suspensions offer highly effective and efficient lighting solutions for schools, libraries, office spaces, and retail outlets. This style is also available in suspended, surface mounted and recessed. The MK-II version features a low-glare, prismatic diffuser.



IP44



SPECIFICATIONS

Material Specifications

Material	1.0mm Aluminium Housing, with Prismatic Diffuser
Finish	Powdercoat
Dimensions	1961mm(L) x 65mm(W) x 88mm(D)
Suspension Length	2000mm (Max)
Ingress Protection	IP44
Warranty	5 Year Replacement

Electrical Specifications


Power Supply	Osram 900mA Integrated LED Driver, Non-Dim
Options	DALI or 0-10V Dimmable
LED Wattage	27W/m
Input Voltage	240V

Optic Specifications

Light Source	Samsung 2835 SMD
Efficacy	>100lm/W
CRI	> 80Ra
UGR	UGR <19
Beam Angle	85°
Colour Deviation	SDCM ≤ 3
Reported L70 (Hours)	> 54,000 Hrs

VARIATIONS

LC8683B	ASTON MK-II 52W Suspended, Black, 85°, Non-Dim, 3000K
LC8683BD	ASTON MK-II 52W Suspended, Black, 85°, DALI, 3000K
LC8683W	ASTON MK-II 52W Suspended, White, 85°, Non-Dim, 3000K
LC8683WD	ASTON MK-II 52W Suspended, White, 85°, DALI, 3000K
LC8684B	ASTON MK-II 52W Suspended, Black, 85°, Non-Dim, 4000K
LC8684BD	ASTON MK-II 52W Suspended, Black, 85°, DALI, 4000K
LC8684W	ASTON MK-II 52W Suspended, White, 85°, Non-Dim, 4000K
LC8684WD	ASTON MK-II 52W Suspended, White, 85°, DALI, 4000K
LC8684WZ	ASTON MK-II 52W Suspended, White, 85°, 0-10V Dim, 4000K
LC8684S	ASTON MK-II 52W Suspended, Silver, 85°, Non-Dim, 4000K
LC8684SD	ASTON MK-II 52W Suspended, Silver, 85°, DALI, 4000K

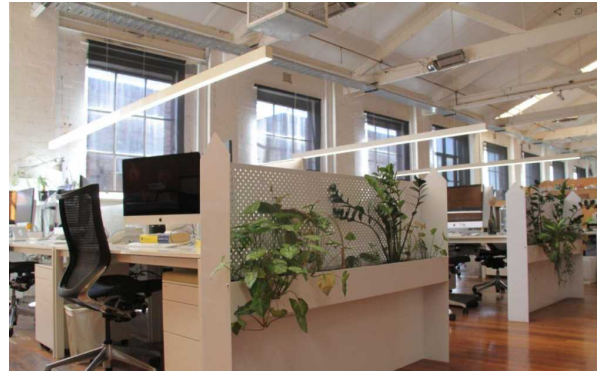

Classic Series

Proven. Quality. Customisable