

# CADE 40W

## 1200mm Slimline Ceiling Batten

dynamic series

Efficient. Cutting Edge. Reliable

CADE LED Ceiling Battens are an awesome new LED solution to replace standard fluorescent battens. Designed to be surface mounted. Very slim aesthetic design. Offering a low power consumption, and high lumen efficiency, the CADE Ceiling Light is the perfect light fitting for functional high-use areas. Available in a tri-colour version (3000K, 4000K, 5700K) for ultimate versatility and 20W and 40W options.



### SPECIFICATIONS

#### Material Specifications


Material	6063 Aluminum housing + PC cover + PC end caps
Finish	White Powdercoat
Dimensions	80mm (W) x 35mm (H) x 1190mm (L)
Ingress Protection	IP44
Impact Rating	IK05
Warranty	5 Year Replacement

#### Electrical Specifications

Power Supply	Integral, Non-Dimmable, 260mA
Connection Method	750mm cable with Wago terminals
Operating Temperature (Ta)	-20°C to +45°C
Input Voltage	240V

#### Optic Specifications

Light Source	Epistar SMD x 200pcs
Optics	Frosted Diffuser
Delivered Lumens	3150lm
Beam Angle	150°
CRI	> 82Ra
Calculated L70 (Hours)	105,000 Hrs
Calculated L80 (Hours)	65,000 Hrs
Calculated L90 (Hours)	33,000 Hrs

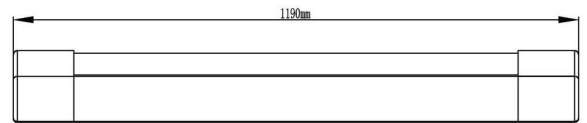

### VARIATIONS

LC2388	CADE 40W Surface Mount Batten, 1190mm, White, 150°, Non-Dim, Tri-Colour
--------	---