

APEX 26W

Backlit Panel Light 600x600

dynamic series

Efficient. Cutting Edge. Reliable

The APEX 26W Backlit panel light 600 x 600 is an indoor lighting solution suitable for commercial applications such as shops, offices, and shopping centres. It features a white aluminium frame and PS diffuser for uniform and soft lighting distribution. The panel is flicker-free, preventing eye strain and headaches. Only suitable for T-Bar plaster recess mounting.



Flicker Free



SPECIFICATIONS

Material Specifications


Material	Aluminium Frame, PS Diffuser
Finish	RAL9016 Traffic White
Dimensions	595mm x 595mm x 30mm
Ingress Protection	IP20
Options	Suitable for T-Bar or Plaster Recess only
Weight	1.76Kg
Warranty	5 Year Replacement

Electrical Specifications

Power Supply	MF C0650K SELV Remote Driver
Input Voltage	240V 50/60Hz
Options	DALI Available
Output Voltage	28V-40V (Driver output) Constant Current
Connection Method	Australian 2-Pin Plug & 1.2m Lead
Operating Temperature (Ta)	-25°C to +40°C

Optic Specifications

Light Source	2835 SMD
Nominal Lumens	2600lm (4000K)
CRI	80Ra
Beam Angle	120°
UGR	<22
Reported L70 (Hours)	>60,000 Hrs

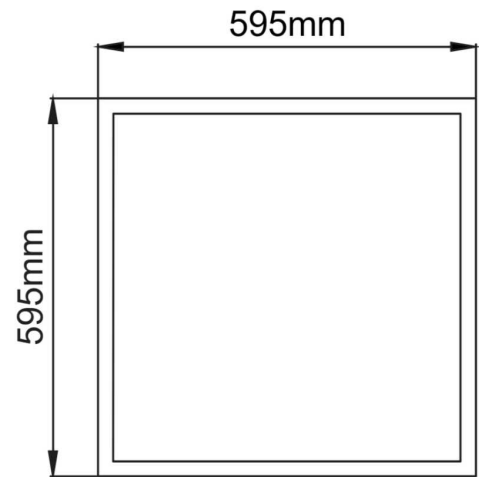

VARIATIONS

LC7700	Apex 26W 600x600 Panel Light, White, Non-Dim, 4000K
---------------	---