

ASTON MK-II 60W

Recessed Profile 2241mm

Classic Series

Proven. Quality. Customisable

The ASTON MK-II 60W Recessed Linear Profiles are a sleek, modern style perfect for commercial architecture. Architectural linear lighting bring clean lines to commercial interiors. Our sleek, stylish LED linear recessed profiles offer highly effective and efficient lighting solutions for schools, libraries, office spaces, and retail outlets. This style is also available in suspended, wall-mounted and surface mount.

The MK-II features a low-glare, prismatic diffuser.



IP44



SPECIFICATIONS

Material Specifications

Material	1.0mm Aluminium Housing, with Prismatic Diffuser
Finish	Powdercoat (Black, White or Silver)
Dimensions	2241mm(L) x 79mm(W) x 40mm(D)
Cutout	71mm(W)
Ingress Protection	IP44
Warranty	5 Year Replacement

Electrical Specifications


Power Supply	Osram LED Remote Driver
Dimming	Non-Dim, 0-10V or DALI
Input Voltage	240V
System Watts	27W/m

Optic Specifications

Light Source	Samsung 2835 SMD
Efficacy	84lm/W
CRI	> 80Ra
Beam Angle	85°
UGR	UGR <19
Colour Deviation	SDCM ≤ 3

VARIATIONS

LC8703B	ASTON MK-II 60W Recessed, Black, 85°, Non-Dim, 3000K
LC8703BD	ASTON MK-II 60W Recessed, Black, 85°, DALI, 3000K
LC8703S	ASTON MK-II 60W Recessed, Silver, 85°, Non-Dim, 3000K
LC8703SD	ASTON MK-II 60W Recessed, Silver, 85°, DALI, 3000K
LC8703W	ASTON MK-II 60W Recessed, White, 85°, Non-Dim, 3000K
LC8703WD	ASTON MK-II 60W Recessed, White, 85°, DALI, 3000K
LC8704B	ASTON MK-II 60W Recessed, Black, 85°, Non-Dim, 4000K
LC8704BD	ASTON MK-II 60W Recessed, Black, 85°, DALI, 4000K
LC8704S	ASTON MK-II 60W Recessed, Silver, 85°, Non-Dim, 4000K
LC8704SD	ASTON MK-II 60W Recessed, Silver, 85°, DALI, 4000K
LC8704W	ASTON MK-II 60W Recessed, White, 85°, Non-Dim, 4000K

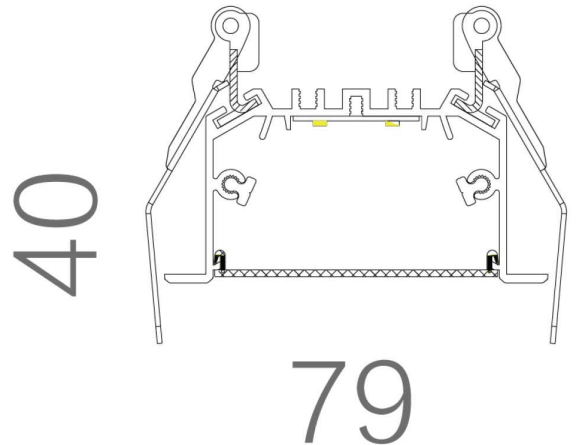

LC8704WD ASTON MK-II 60W Recessed, White, 85°, DALI, 4000K
LC8422B ASTON MK-II Straight Connector - Recessed, Black

Classic Series

Proven. Quality. Customisable